



| | |
|---------------------|--------------|
| Project: | Type: |
| Prepared By: | Date: |

| Driver Info | | LED Info | |
|-------------|------------------|----------------|-------------------------------|
| Type | Constant Current | Watts | 20W |
| 120V | 0.19A | Color Temp | 2700K/3000K/3500K/4000K/5000K |
| 208V | 0.11A | Color Accuracy | 90 CRI |
| 240V | 0.09A | L70 Lifespan | 50,000 Hours |
| 277V | 0.08A | Lumens | 1,500 lm |
| Input Watts | 20W | Efficacy | 71 |

Technical Specifications

Performance

Description:

5CCT selectable, low maintenance, standard back-lit LED retrofit fixture installs on standard junction boxes. Integrated emergency battery back up.

Product Type:

Surface & Flush Mounts

Input Wattage:

20W

Lumens (Nominal):

1,500lm

Efficacy:

75lm/W

L70 Lifespan:

50,000-Hour LED lifespan based on IES LM-70 results

Electrical

Power Factor:

0.9

Operating Frequency:

50/60Hz

Construction

Material:

Plastic

Trim Style:

Smooth Trim

Shape:

Round

Mounting:

Surface mount

Operating Temperature Range:

-20°C - 40°C (-4°F - 104°F)

Other


Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

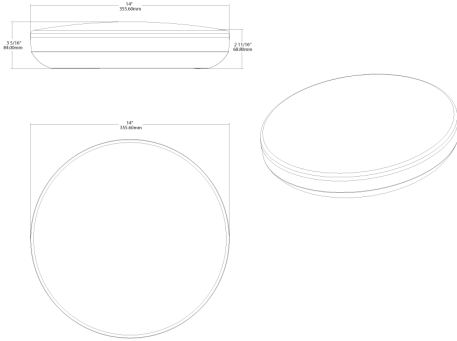

Features

- Surface Mount to ceiling or wall
- Field adjustable "set and forget" color temperature
- Diffused lens provides soft, smooth light
- Ideal for hospitality and multi-family residential applications
- Suitable for wet and damp locations
- 50,000-Hour lifespan

Ordering Matrix

| Family | Type | Size | Shape | Wattage | CRI/Color Temp | Voltage | Dimming | Finish | Sensor | Options | | | | | |
|--------|---------------------------------|---|--------------|---|-------------------------------------|------------------------------------|---|---|--|--|---|---|---|---|-------|
| CRVFA | S | - | 14 | R | - | 20 | - | 9CCT | - | UNV | T | - | W | - | /EMBB |
| | S = Smooth D = Decorative | 11 = 11" 12 = 12" 14 = 14" 18 = 18" 19 = 19" | R = Round | 16 = 16W 20 = 20W 32 = 32W | 9CCT = 90 CRI, CCT Selectable | 120 = 120V UNV = 120-277V | Blank = 0-10V Dimming T = Triac Dimming | W = White BN = Brushed Nickel | Blank = No Sensor /MVS = Microwave Occupancy Sensor | Blank = No Option /EM = Battery Backup /EMBB = Battery Backup | | | | | |