



| | |
|---------------------|--------------|
| Project: | Type: |
| Prepared By: | Date: |

| Driver Info | | LED Info | |
|-------------|-------------------|----------------|-------------------|
| Type | Constant Current | Watts | 30/25/20W |
| 120V | 0.25A/0.21A/0.17A | Color Temp | 3500K/4000K/5000K |
| 208V | 0.14A/0.12A/0.10A | Color Accuracy | 84-85 CRI |
| 240V | 0.13A/0.10A/0.08A | L70 Lifespan | 100,000 Hours |
| 277V | 0.11A/0.09A/0.07A | Lumens | 2,661-4,028 lm |
| Input Watts | 19.7-30W | Efficacy | 131.2-137.9 lm/W |

Technical Specifications

Field Adjustability

Field Adjustable:

Field Adjustable Light Output:
1' x 4': 30W/25W/20W (factory default 30W)
Color temperature selectable by 3500K, 4000K and 5000K (factory default 4000K)

Compliance

UL Listed:

Suitable for damp locations

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

DLC Listed:

This product is listed by Design Lights Consortium (DLC) as an ultra-efficient premium product that qualifies for the highest tier of rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.
DLC Product Code: S-W5P3TN

Electrical

Driver:

30W: Class 2, Constant Current, 120-277V, 50/60 Hz, 120V: 0.25A, 208V: 0.14A, 240V: 0.13A, 277V: 0.11A
25W: Class 2, Constant Current, 120-277V, 50/60 Hz, 120V: 0.21A, 208V: 0.12A, 240V: 0.10A, 277V: 0.09A
20W: Class 2, Constant Current, 120-277V, 50/60 Hz, 120V: 0.17A, 208V: 0.10A, 240V: 0.08A, 277V: 0.07A

Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

THD:

7.05% at 120V, 14.02% at 277V

Power Factor:

99.7% at 120V, 98% at 277V

Surge Protection:

L-N: 1KV
L/N-PE: 2KV

Construction

Cold Weather Starting:

The minimum starting temperature is -20°C (-4°F)

Ambient Temperature:

Suitable for use in up to 40°C (104°F)

IC Rated:

Suitable for direct contact with insulation

Housing:

Polypropylene (PP)

Mounting:

Recessed ceiling

Reflector:

Integral reflector (on the sides) with high reflectance finish, optimized for uniform distribution.

Lens:

Polycarbonate lens

Finish:

Formulated for high durability and long-lasting color

Green Technology:

Mercury and UV free. RoHS-compliant components.

LED Characteristics

LEDs:

Long-life, high-efficacy, surface-mount LEDs

Technical Specifications (continued)

Color Stability:

LED color temperature is warranted to shift no more than 200K in color temperature over a 5-year period

Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

Performance

Lifespan:

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

Lightcloud

Lightcloud Blue Low Voltage Controller and Related Sensor Installed:

Occupancy, Vacancy, and closed loop daylight harvesting in one versatile sensor. In addition control any fixture in your Lightcloud Blue integrated/embedded networked lighting luminaire-level control system. LLLC - capable of switching, 0-10V dimming, power/energy monitoring. Can also be used to extend the range of the Lightcloud Blue utilizing a "BLE Mesh" network communication protocols. The Lightcloud Blue sensor can be attached to the fixture provided an unobstructed view of the coverage area is available. DLC system - N1XMLOEATBA
[Learn more about Lightcloud.](#)

Technology:

Microwave Sensor

Microwave Frequency:

5.8GHz +/-7.5MHz

Maximum Mounting Height:

13 ft

Maximum Detection Range:

22 ft diameter at 13 ft mounting height

Default Setting: Uncommissioned State:

Brightness: 100%
Hold Time: 20 Minutes
Daylight: Disabled
Motion Sensitivity: High
Stand-by Dimming Level: 20%
Stand-by Time: 1 Minute

Commissioned State: Disabled, After Turn on the

Occupancy Mode:

Brightness: Last on Brightness
Hold Time: 20 Minutes
Daylight: Disabled
Motion Sensitivity: High
Stand-by Dimming Level: 20%
Stand-by Time: 0 Minute

Other


Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

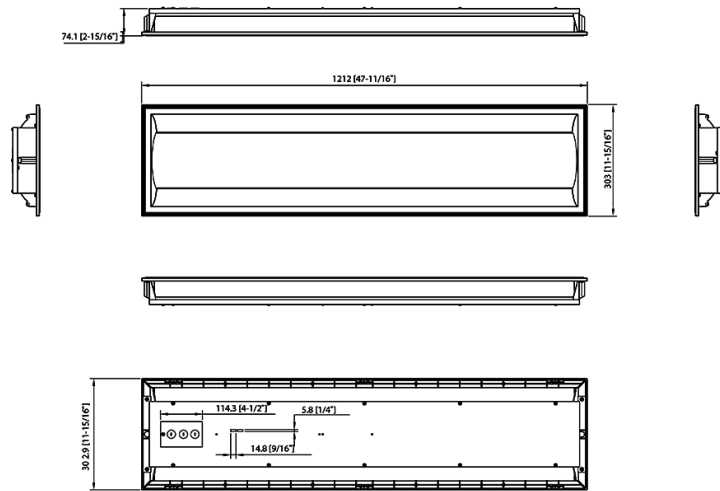

Features

- 0-10V Dimming, standard
- 100,000-hour LED lifespan
- 5-Year, no-compromise warranty

Ordering Matrix

| Family | Size (Wattages) | Color Temp | Finish | Voltage | Options |
|---------|--|--|---------------|---------------------------------|---|
| C-SWISH | 1X4 | | | | /LCBS/MVS |
| | 2X2 = 2' x 2' (30/25/20W) 1X4 = 1' x 4' (30/25/20W) 2X4 = 2 x 4' (36/30/20W) | Blank = 3500K/4000K/5000K CCT Adjustable | Blank = White | Blank = 120-277V, 0-10V Dimming | Blank = No Option /E = Battery Backup /MVS = Microwave Occupancy Sensor /LCBS/MVS = Lightcloud Blue MVS Sensor /LC = Lightcloud Controller /LC/E = Lightcloud Controller w/Battery Backup /MVS/E = Microwave Occupancy Sensor w/Battery Backup /LCBS/MVS/E = Lightcloud Blue MVS Sensor w/Battery Backup |