



Weight: 3.0 lbs

Project:	Type:
Prepared By:	Date:

Technical Specifications

Electrical

Input Voltage:

100-277V

Operating Frequency (Hz):

50/60Hz

Power:

Max 4.8W

Output Power:

12W

Emergency Time:

90 min

Output Voltage:

12-48V DC, 0.75A

Operation Temperature:

0°C (32°F) - 50°C (122°F)

Storage Temperature:

-20°C (-4°F) - 60°C (140°F)

Battery Type:

Nickel-Cadmium

Recharge Time Required:

24 Hours Max

Other

Compatible Products:

[CRLED Commercial Downlight CCT Selectable](#)
[Premium Deep Regress Commercial Downlight](#)

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Buy American Act Compliance:


RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Compliance

UL Listed:

UL924 Listed

Dimensions

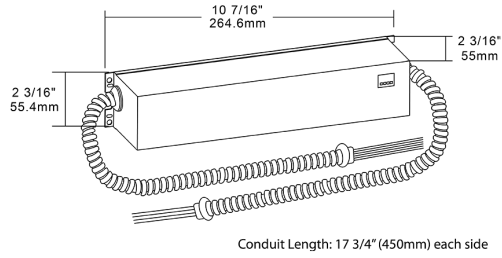

Features

- For use with select RAB Commercial Downlights
- Meets UL924 Requirements