
EMB-R-5

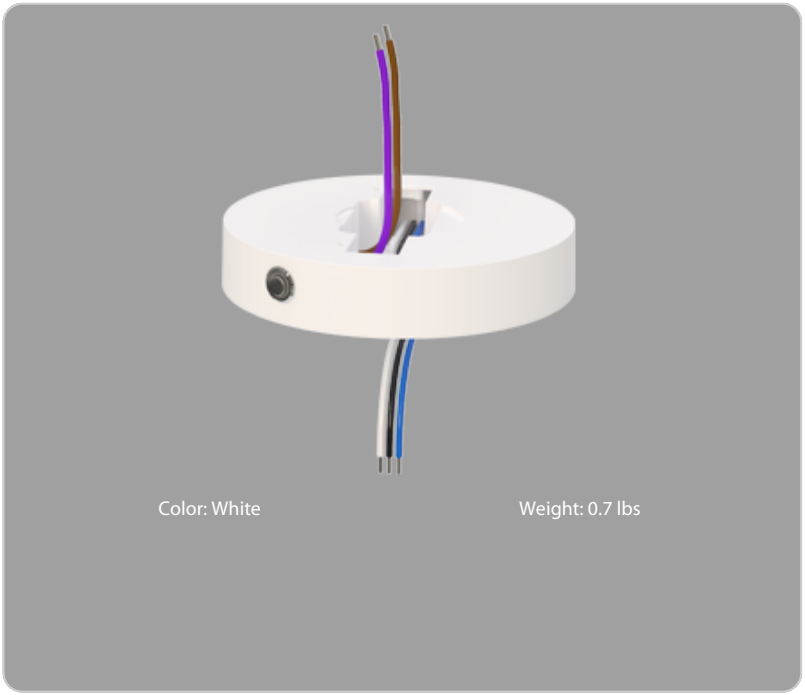

Project:	**Type:**
Prepared By:	**Date:**

Driver Info

Type	N/A
120V	0.26A
208V	N/A
240V	N/A
277V	N/A
Input Watts	N/A

LED Info

Watts	N/A
Color Temp	N/A
Color Accuracy	N/A
L70 Lifespan	N/A
Lumens	N/A
Efficacy	N/A

Technical Specifications

Performance

Product Type:
Battery Backup for SUMO

Description:
Mounting kits, battery backup and color trims for field adjustable surface mounts.

Electrical

Driver:
Continuous Wave @ 120V, 50/60 Hz: 0.10 A

Input Voltage:
120V

Operating Frequency:
50/60Hz

Input Current @ 120V (mA):
0.10A

Construction

Operating Temperature Range:
-4°F - 104°F (-20°C - 40°C)

Size:
5.5"

Shape:
Round

Finish:
Matte White, fade & Scratch resistant

Enclosure Material:
Plastic

Emergency Backup

Emergency Operation:
90 minutes

Emergency Characteristics

Battery Recharge Time:
24 hours

Installation

Mounting:
Surface mount

Compliance

Environment:
Suitable for use indoors in dry and damp environments.

Certification Model Number:
DRI010(EMB-R-5)

California Title 20 Compliant:
Can be used to conform with the requirements of California Title 20

California Title 24 JA8 Compliant:
No

California Energy Commission (CEC) Status:
Lawful for Sales in California

IESNA LM-79 & LM-80 Testing:
RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

RoHS:
Mercury and UV free. RoHS-compliant components.

FCC:
Complies with Part 15 of the FCC Rules

Trade Agreements Act Compliant:
This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

Other


Compatible Products:
SUMO-R-5[K]
5.5" Slim SUMO round surface mount

Copyright © 2026 RAB Lighting All Rights Reserved Note: Specifications are subject to change at any time without notice

Technical Specifications (continued)

5-Year, No-Compromise Warranty:
RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Dimensions

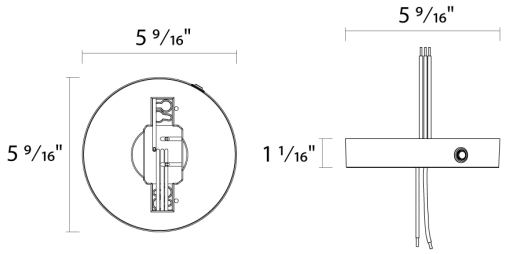

Features

- 90-minute emergency runtime on battery power
- Compatible with SUMO Slim round surface mounts
- Automatic switchover during power outage
- LED indicator shows charge and battery status
- Monthly and annual self-test capable
- Unswitched AC input, 100-277V
- Dry and damp location rated

Copyright © 2026 RAB Lighting All Rights Reserved Note: Specifications are subject to change at any time without notice