



Color: Mirror

Weight: 3.2 lbs

Project:

Type:

Prepared By:

Date:

Technical Specifications

Performance

Product Type:

Emergency Unit, Wet Location Rated

Product Series:

EMOUT Outdoor Emergency Light

Description:

Outdoor rated Emergency Light available with battery backup.

Input Power (W):

2.4W

Lumens (lm):

400lm

Maximum Output Wattage (W):

4W

Construction

Housing Material:

Thermoplastic Housing 5VA Flame Rating

Housing Finish:

White Housing

Illumination Source:

2 Lamp Heads

Optical System:

Precision engineered Prismatic Lens

Head Orientation:

Adjustable heads for aiming light where required

Remote Capable:

No

LED Characteristics

Color Temperature:

6500K

Electrical

Power Factor:

0.8

Input Voltage (V):

120/277 Dual Voltage

Operating Frequency:

60 Hz

Input Current @ 120V (A):

0.025A

Input Current @ 277V (A):

0.01A

Operating Temperature:

32°F to 104°F (0°C to 40°C)

Emergency Characteristics

Battery Backup:

Yes

Emergency Illumination:

90 minutes

Battery:

Nickel Cadmium

Battery Voltage:

Battery Voltage

Recharge Time:

Maximum 24 hours for full recharge time

Battery Operating Temperature:

32°F to 122°F (0°C to 50°C)

Testing Method:

Integrated Test Switch & Charge Indicator

Installation

Mounting:

Universal J-Box Mounting Pattern

Application:

Wall Mount

Mounting Height:

11.9 ft

Technical Specifications (continued)

Compliance

Listings:

UL924 Listed, NFPA 101 (current Life Safety Code),
NEC and OSHA illumination standards

Environment:

Suitable for use in wet location

IP Rating:

IP65

T20 Compliant:

Can be used to conform with the requirements of
California Title 20

California Title 24 JA8 Compliant:

No

California Energy Commission (CEC) Status:

Lawful for Sales in California

FCC:


Complies with Part 15 of the FCC Rules

Other

3-Year, No-Compromise Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of three (3) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Dimensions

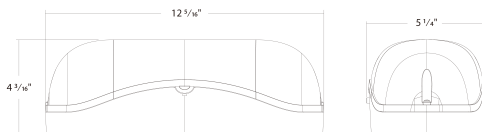

Features

Engineered with waterproof and corrosion-resistant materials designed for challenging environments

Injection-molded thermoplastic ABS housing, UL 94V-0 flame rating

Suitable for wall and ceiling mount applications

Built-in 3.6V 2000mAh Nickel cadmium battery for minimum 90 minutes emergency operation

Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes. Compliant with California Title 20

Ordering Matrix

Family	Remote Capacity	Housing Color	Driver
EMOUT			

Blank = No Remote Capable Blank = White Blank = 120-277V