



Explosionproof fixture for ceiling mounting. Cast aluminum housing, heat and impact resistant globe. Fits all incandescent lamps up to 300 Watt PS-25. Lamp not supplied.

Color: Silver gray

Weight: 10.8 lbs

Project:

Type:

Prepared By:

Date:

**Lamp Info**

Type	PS-25
Watts	300W
Shape/Size	N/A
Base	N/A
ANSI	N/A
Hours	N/A
Lamp Lumens	N/A
Efficacy	N/A

**Ballast Info**

Type	N/A
120V	N/A
208V	N/A
240V	N/A
277V	N/A
Input Watts	N/A

**Technical Specifications**

**Construction**

**Housings:**

Heavy-cast aluminum. Unit withstands 1490 lbs. per square inch hydrostatic pressure.

**Globe:**

Impact and heat resistant clear prismatic design affords excellent light control

**Finish:**

Formulated for high durability and long-lasting color

**Reflectors:**

Heavy gauge aluminum with highly reflective white acrylic finish

**Hub Size:**

1/2"

**Hub Count:**

4

**Guard not supplied:**

**Weight:**

11 lb / 5 kg

**Electrical**

**Wiring:**

Wiring is factory sealed. Inspection hole provides easy access to splice compartment.

**Socket:**

Medium base glazed porcelain. Leads pass through sealing compound that separates lamp chamber from wiring compartment. Heavy gauge nickel plated copper components. Spring loaded center contact.

**Other**


**Refer to the catalog for Class and Division specifications:**

**Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.



## Dimensions

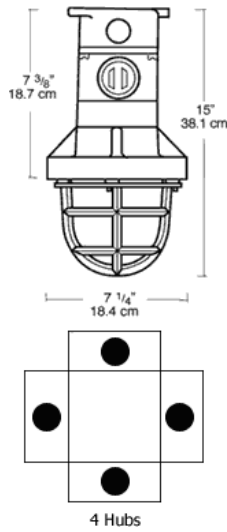

## Features

- Fixture comes complete with built-in junction box
- Cast aluminum construction with gray polyester powder coat finish
- Easy relamping with a single thumb screw
- Factory sealed for easy installation
- Heat and impact resistant prismatic glass globe
- Die cast guard
- Easy field installation