



Explosionproof fixture for ceiling mounting. Cast aluminum housing, heat and impact resistant globe. Fits all incandescent lamps up to 300 Watt PS-25. Lamp not supplied.

Color: Silver gray

Weight: 11.8 lbs

**Project:**

**Type:**

**Prepared By:**

**Date:**

### Lamp Info

Type	PS-25
Watts	300W
Shape/Size	N/A
Base	N/A
ANSI	N/A
Hours	N/A
Lamp Lumens	N/A
Efficacy	N/A

### Ballast Info

Type	N/A
120V	N/A
208V	N/A
240V	N/A
277V	N/A
Input Watts	N/A

## Technical Specifications

### Construction

#### Housings:

Heavy-cast aluminum. Unit withstands 1490 lbs. per square inch hydrostatic pressure.

#### Globe:

Impact and heat resistant clear prismatic design affords excellent light control

#### Finish:

Formulated for high durability and long-lasting color

#### Reflectors:

Heavy gauge aluminum with highly reflective white acrylic finish

#### Hub Size:

1/2"

#### Hub Count:

4

#### Guard supplied:

#### Weight:

12 lb / 5.4 kg.

### Electrical

#### Wiring:

Wiring is factory sealed. Inspection hole provides easy access to splice compartment.

#### Socket:

Medium base glazed porcelain. Leads pass through sealing compound that separates lamp chamber from wiring compartment. Heavy gauge nickel plated copper components. Spring loaded center contact.

### Other


#### Refer to the catalog for Class and Division specifications:

#### Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.



## Dimensions

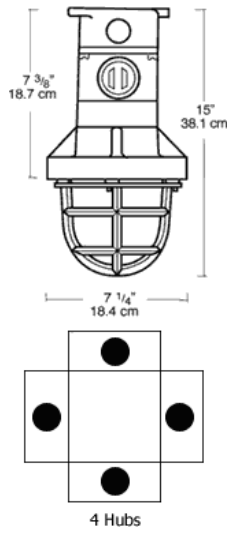

## Features

- Fixture comes complete with built-in junction box
- Cast aluminum construction with gray polyester powder coat finish
- Easy relamping with a single thumb screw
- Factory sealed for easy installation
- Heat and impact resistant prismatic glass globe
- Die cast guard
- Easy field installation