



Explosion proof fixture for ceiling mounting. Cast aluminum housing, heat and impact resistant globe. Fits all incandescent lamps up to 300 Watt PS-25. Lamp not supplied.

Color: Silver gray Weight: 11.1 lbs

Project:	Туре:
Prepared By:	Date:

Lamp Info		Ballast Info	
Туре	PS-25	Туре	N/A
Watts	300W	120V	N/A
Shape/Size	N/A	208V	N/A
Base	N/A	240V	N/A
ANSI	N/A	277V	N/A
Hours	N/A	Input Watts	N/A
Lamp Lumens	N/A		
Efficacy	N/A		

Technical Specifications

Construction

Heavy-cast aluminum. Unit withstands 1490 lbs. per square inch hydrostatic pressure.

Globe

Impact and heat resistant clear prismatic design affords excellent light control

Finish

Formulated for high durability and long-lasting color

Reflectors:

Heavy gauge aluminum with highly reflective white acrylic finish

Hub Size:

3/4"

Hub Count:

R

Guard not supplied:

Weight:

11 lb / 5 kg

Electrical

Wiring:

Wiring is factory sealed. Inspection hole provides easy access to splice compartment.

Socket

Medium base glazed porcelain. Leads pass through sealing compound that separates lamp chamber from wiring compartment. Heavy gauge nickel plated copper components. Spring loaded center contact.


Other

Refer to the catalog for Class and Division specifications:

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.



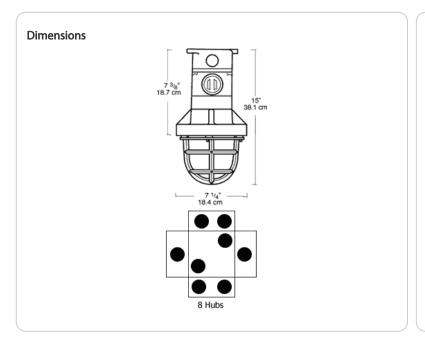

Features

Fixture comes complete with built-in junction box

Cast aluminum construction with gray polyester powder coat finish

Easy relamping with a single thumb screw

Factory sealed for easy installation

Heat and impact resistant prismatic glass globe

Die cast guard

Easy field installation