
## EXIT-1RACH/E

# RAB

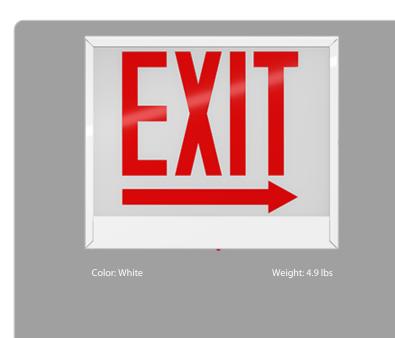

Project:	Туре:
Prepared By:	Date:

### **Technical Specifications**

Performance Product Type: Chicago Approved Steel Exit/Stair Sign

**Description:** Chicago Approved exit sign with a single face and red letters. 90-minutes of emergency battery

Input Wattage: 5W @120V and 277V

Electrical Power Factor: ≥0.4

backup.

Input Voltage: Dual 120/277Vage

**Operating Frequency:** 60Hz

Input Current @ 120V (mA): 10mA

Input Current @ 277V (mA): 50mA

**Operating Temperature:** 32°F to 122°F (0°C to 50°C) **Emergency Illumination:** 90 minutes

Battery Backup: Battery Backup

Battery Type: Nickel Cadmium

Battery Voltage: 4.8V

Recharge Time Required: 24-hours

**Storage Temperature:** 68°F to 86°F (20°C to 30°C)

Storage Shelf Life: 3 years before the initial charge. 5 years after initial charge.

Self Diagnostics: Manual Test

Installation Mounting Method: Back/Top/End

Mounting Type: Wall/Ceiling Mount Cold Weather Rated: No

Construction Shape: Rectangle

Housing Material: Steel Sheet

Panel Material: Glass

Panel Color: White

Letter Color: Red

Housing Finish: White

Number of Faces: Single Face

Arrow Direction: Right Arrow

Sign Format: Panel

## EXIT-1RACH/E



### **Technical Specifications (continued)**

Remote Capacity: No Remote Capacity

#### .

## Compliance

Listings: UL924 Listed, NFPA 101 (current Life Safety Code), NEC and OSHA illumination standards

#### **Environment:**

Suitable for indoor use in dry and damp environments

## IP Rating:

Indoor

#### Model Number for Certification: CAXTEU1RWEM-RA

#### T20 Compliant:

Can be used to conform with the requirements of California Title 20

California Title 24 JA8 Compliant: Not applicable

California Energy Commission (CEC) Status: Lawful for Sales in California

#### **City Compliance:**

Chicago Approved

#### FCC:

Complies with Part 15B of the FCC Rules

### Other

#### Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at <u>rablighting.com/warranty.</u> Battery is prorated.

#### Note:


All values are typical (tolerance +/- 10%)

#### **Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

## EXIT-1RACH/E

Dimensions

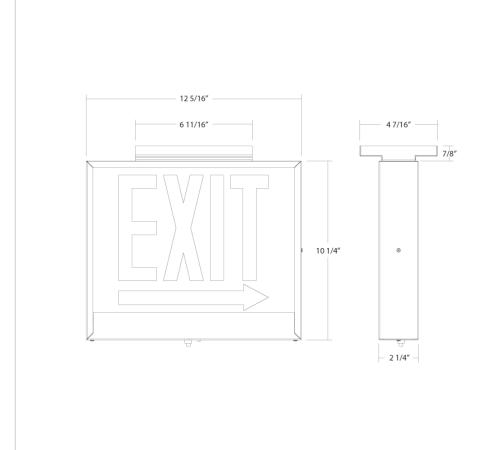

### **Ordering Matrix**

Family	Face	Exit Sign Letter Color	Arrows	Housing	State	Battery Backup	Remote Capable
EXIT	1		RA		СН	/E	
	Blank = Universal Faces 1 = 1 Face	Blank = Red G = Green	Blank = No Arrow DA = Double Arrow LA = Left Arrow RA = Right Arrow LRA = Left Right Arrow	<b>Blank =</b> White Housing	CH = Chicago NY = New York	Blank = No Battery Backup /E = Battery Backup	Blank = No Remote Capable R = Remote Capable

Need help? Tech help line: **(888) 722-1000** Email: **sales@rablighting.com** Website: **www.rablighting.com** Copyright © 2023 RAB Lighting All Rights Reserved Note: Specifications are subject to change at any time without notice