# EXITEDGE-1MPSNY/E

# RAB



| Project:     | Туре: |
|--------------|-------|
| Prepared By: | Date: |

## **Technical Specifications**

Performance Product Type: New York City Compliant Edge-lit Exit Sign

### Description:

New York City Approved edge-lit exit sign with a single face and red letters. 90-minutes of emergency battery backup.

Input Wattage: 4W @120V and 277V

Electrical Power Factor: ≥0.9

Input Voltage: Dual 120/277Vage

**Operating Frequency:** 60Hz

Input Current @ 120V (mA): 30mA

Input Current @ 277V (mA): 20mA

**Operating Temperature:** 32°F to 122°F (0°C to 50°C) **Emergency Illumination:** 90 minutes

Battery Backup: Battery Backup

Battery Type: Nickel Cadmium

Battery Voltage: 4.8V

Recharge Time Required: 24-hours

**Storage Temperature:** 68°F to 86°F (20°C to 30°C)

Storage Shelf Life: 3 years before the initial charge. 5 years after initial charge.

Self Diagnostics: Self-Diagnostics

Installation Mounting Method: Back/Top/End

Mounting Type: Wall/Ceiling Mount Cold Weather Rated: No

Construction Shape: Rectangle

Housing Material: Aluminum

Panel Material: Acrylic

Panel Color: Mirror

Letter Color: Red

Housing Finish: Aluminum

Number of Faces: Single Face

Sign Format: Edge-lit

Remote Capacity: No Remote Capacity

# **EXITEDGE-1MPSNY/E**

# RAB

## **Technical Specifications (continued)**

### Compliance

### Listings:

UL924 Listed, NFPA 101 (current Life Safety Code), NEC and OSHA illumination standards

### Environment:

Suitable for indoor use in dry and damp environments

## IP Rating:

Indoor

## Model Number for Certification:

NYELXTEU1RMAEMSDT

### T20 Compliant:

Can be used to conform with the requirements of California Title 20

### California Title 24 JA8 Compliant:

Not applicable

California Energy Commission (CEC) Status: Lawful for Sales in California

### **City Compliance:**

New York City Approved

FCC:

Complies with Part 15B of the FCC Rules

### Other

### Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at <u>rablighting.com/warranty.</u> Battery is prorated.

### Note:


All values are typical (tolerance +/- 10%)

### **Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

# EXITEDGE-1MPSNY/E

Dimensions

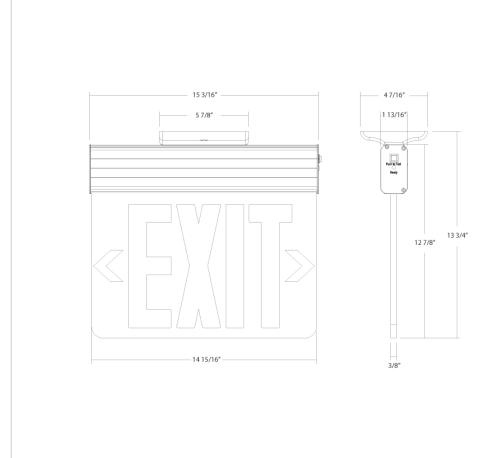

## **Ordering Matrix**

| Family   | Face                             | Exit Sign Letter<br>Color              | Panel   | Housing  | Self Testing                                   | State   | Battery Backup                                      |
|----------|----------------------------------|--|---|--|--|---|---|
| EXITEDGE | 1                                |  | MP  |  | S  | NY  | /E  |
|          | Blank = 2<br>Faces<br>1 = 1 Face | <b>Blank =</b> Red<br><b>G =</b> Green | Blank = Clear<br>Panel<br>MP = Mirror Panel<br>WP = White Panel | Blank = Aluminum<br>Housing<br>W = White Housing | Blank = No Self<br>Testing<br>S = Self Testing | Blank = No State<br>CH = Chicago<br>NY = New York | Blank = No Battery<br>Backup<br>/E = Battery Backup |