EXITEDGE-RE-WPWCH

RAB



Project:	Туре:
Prepared By:	Date:

Technical Specifications

Performance Product Type: Chicago-Approved Edge-Lit Exit Sign

Description: Chicago-approved edge-lit exit sign with a double face and red letters.

Input Power: 4.3W@120V 4.7W@277V

Electrical

Power Factor: ≥0.9

Input Voltage: Dual 120/277 Voltage

Operating Frequency (Hz): 60Hz

Input Current @ 120V (mA): 42mA

Input Current @ 277V (mA): 20mA

Dual Voltage Circuit Operation: No **Operating Temperature:** 32°F to 122°F (0°C to 50°C)

Storage Temperature: 68°F to 86°F (20°C to 30°C)

Self Diagnostics: No, manual test only

Remote Test Switch: No

Installation Mounting Method: Top

Mounting Type: Recessed Ceiling Mount

Cold Weather Rated: No

Construction Shape: Rectangle

Housing Material: Aluminum

Panel Material: Acrylic Panel Color: White

Letter Color: Red

Housing Color: White

Number of Faces: Double Face

Arrow Direction: No Arrow

Arrow Material: Screen Print

Sign Format: Edge-lit

Remote Capacity: No

Compliance

Listings: UL924 Listed, NFPA 101 (current Life Safety Code), NEC and OSHA illumination standards

Need help? Tech help line: (888) 722-1000 Email: sales@rablighting.com Website: www.rablighting.com Copyright © 2024 RAB Lighting All Rights Reserved Note: Specifications are subject to change at any time without notice

EXITEDGE-RE-WPWCH

RAE

Technical Specifications (continued)

Environment:

Suitable for indoor use in dry and damp environments

IP Rating:

Indoor

Certification Model Number:

CARELZXTE2RWWNA

T20 Compliant:

Can be used to conform with the requirements of California Title 20

California Title 24 JA8 Compliant:

Not applicable

California Energy Commission (CEC) Status: Lawful for Sales in California

City Compliance:

Chicago Approved

FCC:

Complies with Part 15 of the FCC Rules

Other

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at <u>rablighting.com/warranty.</u> Battery is prorated.


Note:

All values are typical (tolerance +/- 10%)

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

EXITEDGE-RE-WPWCH

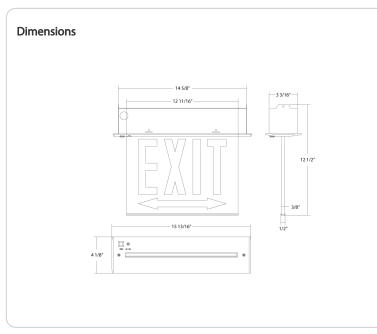

Features

Double-face panel with red letters Modern edge-lit design Approved for use in the city of Chicago Compliant with California Title 20

Ordering Matrix

Family	Mounting	Face	Exit Sign Letter Color	Panel	Housing	Arrows	Self Testing	State	Battery Backup
EXITEDGE	RE			WP	W			СН	
	RE = Recessed Ceiling Mount Blank = Wall/Ceiling Surface Mount	Blank = Universal Faces 1 = 1 Face	Blank = Red G = Green	Blank = Clear Panel MP = Mirror Panel WP = White Panel	Blank = Aluminum Housing W = White Housing	Blank = No Arrow LRA = Left/Right Arrow RA = Right Arrow LA = Left Arrow DA = Double Arrow	Blank = No Self Testing S = Self Testing	Blank = Standard CH = Chicago NY = New York	Blank = No Battery Backup /E = Battery Backup