**EXITOUT-GC** 





Project:	Туре:
Prepared By:	Date:

# **Technical Specifications**

#### **Performance**

#### **Product Type:**

Outdoor Exit Sign

#### Description:

Outdoor exit sign with a single face and green letters. Wet and cold weather rated.

# Input Wattage:

3.3W

# Electrical

# Power Factor:

≥0.9

# Input Voltage:

Dual 120/277Vage

# **Operating Frequency:**

60Hz

# Input Current @ 120V (mA):

30mA

#### Input Current @ 277V (mA):

14mA

## **Operating Temperature:**

-4°F to 122°F (-20°C to 50°C)

## **Emergency Illumination:**

90 minutes

## **Battery Backup:**

Battery Backup

#### **Battery Type:**

Nickel Cadmium

#### **Battery Voltage:**

4 8V

## **Recharge Time Required:**

24-hours

# Storage Temperature:

68°F to 86°F (20°C to 30°C)

## Storage Shelf Life:

3 years before the initial charge. 5 years after initial charge.

## Self Diagnostics:

Manual Test

# Installation

# Mounting Method:

Back/Top/End

## **Mounting Type:**

Wall/Ceiling Mount

## **Cold Weather Rated:**

Yes

#### Construction

#### Shape:

Rectangle

## **Housing Material:**

Thermoplastic

## Panel Material:

Thermoplastic

# **Panel Color:**

White

#### Letter Color:

Green

#### **Housing Finish:**

White

## Number of Faces:

Single Face

#### Sign Format:

Stencil

# Remote Capacity:

No Remote Capacity

**EXITOUT-GC** 



# **Technical Specifications (continued)**

## Compliance

# Listings:

UL924 Listed, NFPA 101 (current Life Safety Code), NEC and OSHA illumination standards

#### **Environment:**

Suitable for indoor or outdoor use in dry, damp, and wet environments

## IP Rating:

Outdoor

## **Model Number for Certification:**

WLEZXTEU1GWEM-CW

#### T20 Compliant:

Can be used to conform with the requirements of California Title 20

## California Title 24 JA8 Compliant:

Not applicable

## California Energy Commission (CEC) Status:

Lawful for Sales in California

#### FCC:

Complies with Part 15B of the FCC Rules

# Other

# Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at <a href="mailto:rable-the-r


#### Note:

All values are typical (tolerance +/- 10%)

#### **Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.



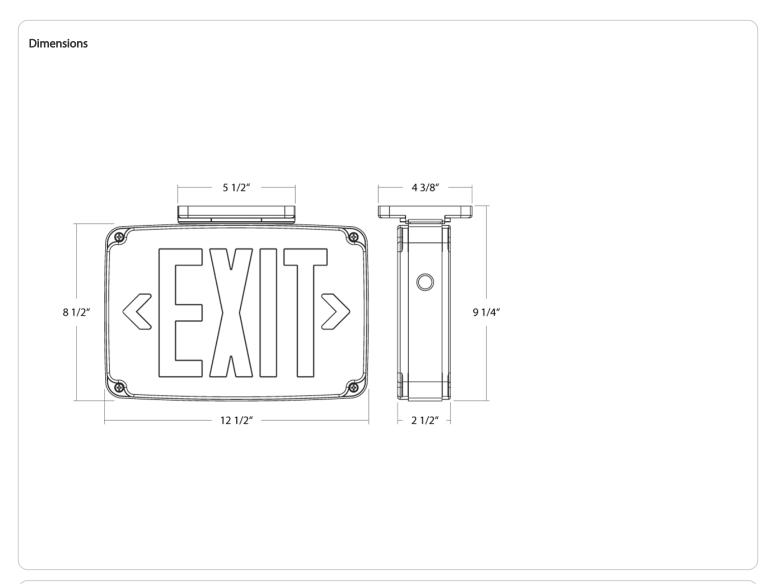

Ordering Ma	trix				
Family	Face	Exit Sign Letter Color	Panel	Housing	Cold Weather
EXITOUT		G			С
	Blank = 1 Face	<b>Blank</b> = Red <b>G</b> = Green	<b>Blank</b> = White Panel	<b>Blank</b> = White Housing	Blank = Wet Location Rated C = Cold Weather