


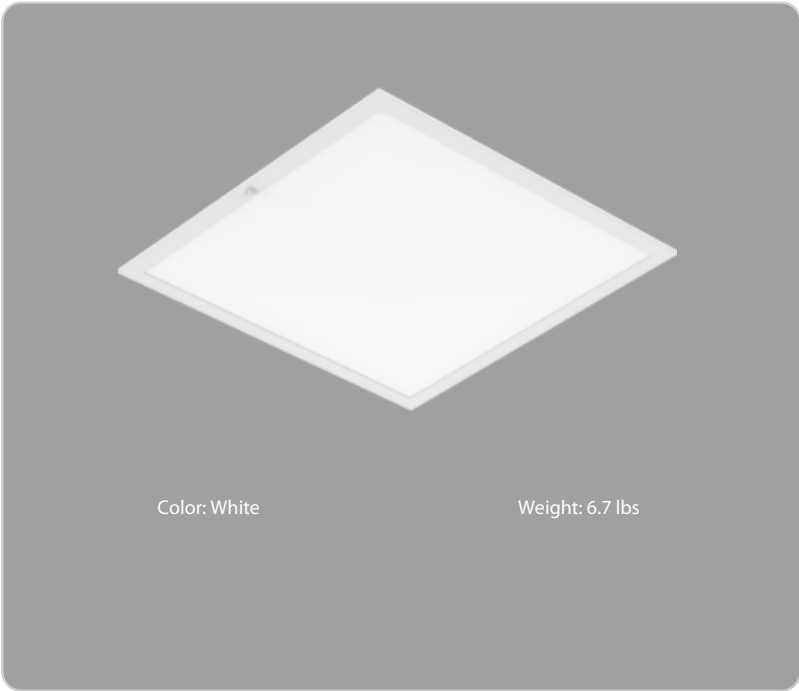

|              |       |
|--------------|-------|
| Project:     | Type: |
| Prepared By: | Date: |

| Driver Info |                   | LED Info       |                  |
|-------------|-------------------|----------------|------------------|
| Type        | Constant Current  | Watts          | 36/30/25W        |
| 120V        | 0.33A/0.25A/0.21A | Color Temp     | 3500/4000/5000K  |
| 208V        | 0.19A/0.14A/0.12A | Color Accuracy | 82-84 CRI        |
| 240V        | 0.17A/0.13A/0.10A | L70 Lifespan   | N/A              |
| 277V        | 0.14A/0.11A/0.09A | Lumens         | 3,462-5,014 lm   |
| Input Watts | 24.3-35.7W        | Efficacy       | 134.8-146.6 lm/W |

| Technical Specifications                                                                                                                                                                                                                                            |  |                                                                                                                                                                                                                                                   |  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| <b>Field Adjustability</b>                                                                                                                                                                                                                                          |  | <b>Electrical</b>                                                                                                                                                                                                                                 |  |
| <b>Field Adjustable:</b><br>Field Adjustable Light Output:<br>36W/30W/25W (factory default: 36W)<br>Color Temperature Selectable:<br>3500K, 4000K and 5000K (factory default:4000K)                                                                                 |  | <b>Driver:</b><br>Constant Current, Class II, 120-277V, 50/60 Hz:<br>40W: 120V: 0.33A, 208V: 0.19A, 240V: 0.17A, 277V: 0.14A<br>30W: 120V: 0.25A, 208V: 0.14A, 240V: 0.13A, 277V: 0.11A<br>25W: 120V: 0.21A, 208V: 0.12A 240V: 0.10A, 277V: 0.09A |  |
| <b>Compliance</b>                                                                                                                                                                                                                                                   |  | <b>Dimming Driver:</b><br>Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.                                                                                         |  |
| <b>UL Listed:</b><br>Suitable for damp locations                                                                                                                                                                                                                    |  | <b>Power Factor:</b><br>99.3% at 120V, 96.3% at 277V                                                                                                                                                                                              |  |
| <b>IESNA LM-79 &amp; LM-80 Testing:</b><br>RAB LED luminaires have been tested by an independent laboratory in accordance with IESNA lm-79 and lm-80                                                                                                                |  | <b>Aux Power Supply:</b><br>No                                                                                                                                                                                                                    |  |
| <b>Trade Agreements Act Compliant:</b><br>This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act                                                                                                  |  | <b>Dim to Off:</b><br>Yes                                                                                                                                                                                                                         |  |
| <b>DLC Listed:</b><br>This product is listed by Design Lights Consortium (DLC) as an ultra-efficient premium product that qualifies for the highest tier of rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.<br>DLC Product Code: S-8VMHXZ |  | <b>Battery Backup:</b><br>Battery backup will operate the LED Lamp for 90 minutes if power fails. Wired for 120V-277V.                                                                                                                            |  |
|                                                                                                                                                                                                                                                                     |  | <b>Battery Backup Light Loss Factor:</b><br>36W: 41.7%<br>30W: 50%<br>25W: 60%                                                                                                                                                                    |  |
|                                                                                                                                                                                                                                                                     |  | <b>Surge Protection:</b><br>2 kV + 4 kV                                                                                                                                                                                                           |  |
|                                                                                                                                                                                                                                                                     |  | <b>Construction</b>                                                                                                                                                                                                                               |  |
|                                                                                                                                                                                                                                                                     |  | <b>Cold Weather Starting:</b><br>The minimum starting temperature is 0°C (32°F)                                                                                                                                                                   |  |
|                                                                                                                                                                                                                                                                     |  | <b>Maximum Ambient Temperature w/Battery Backup:</b><br>Suitable for use in up to 104°F (40°C)                                                                                                                                                    |  |
|                                                                                                                                                                                                                                                                     |  | <b>IC Rated:</b><br>Suitable for direct contact with insulation                                                                                                                                                                                   |  |
|                                                                                                                                                                                                                                                                     |  | <b>Lens:</b><br>Precision engineered polystyrene diffuser provides high uniformity, and reduced glare. No visible diodes, hot-spots, or shadows.                                                                                                  |  |
|                                                                                                                                                                                                                                                                     |  | <b>Housing:</b><br>Aluminum+Iron                                                                                                                                                                                                                  |  |
|                                                                                                                                                                                                                                                                     |  | <b>Reflector:</b><br>TPET reflective paper                                                                                                                                                                                                        |  |
|                                                                                                                                                                                                                                                                     |  | <b>Finish:</b><br>Formulated for high durability and long-lasting color                                                                                                                                                                           |  |
|                                                                                                                                                                                                                                                                     |  | <b>Green Technology:</b><br>Mercury and UV free. RoHS-compliant components.                                                                                                                                                                       |  |

## Technical Specifications (continued)

### Installation

#### Mounting:

Surface, suspended & recessed mounting. The mounting accessories sold separately.

#### Installation:

Standard integral T-bar clips secure the fixture to T-bars and prevent T-system separation

### LED Characteristics

#### LEDs:

Long-life, high-efficacy, surface-mount LEDs

#### Color Stability:

LED color temperature is warrantied to shift no more than 200K in color temperature over a 5-year period

#### Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

### Performance

#### Lifespan:

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

#### THD:


11.06% at 120V, 9.56% at 277V

### Other

#### 5-Year, No-Compromise Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

Dimensions

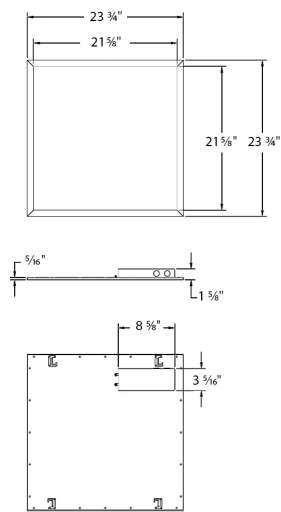

Features

- 100,000-hour LED Lifespan
- DLC Premium Listed
- 5-Year, No-Compromise Warranty

Ordering Matrix

| Family                                                | Wattage | Color Temp                             | Output             | Driver                          | Controls     | Battery Backup                      |
|-------------------------------------------------------|---------|----------------------------------------|--------------------|---------------------------------|--------------|-------------------------------------|
| EZP                                                   | 2X2     |                                        | HE                 |                                 |              | /E                                  |
| 2X2 = 36/30/25W<br>1X4 = 36/30/25W<br>2X4 = 50/40/30W |         | Blank = 3500/4000/5000K CCT Adjustable | HE = High Efficacy | Blank = 120-277V, 0-10V Dimming | Blank = None | Blank = None<br>/E = Battery Backup |