



Project:	Type:
Prepared By:	Date:

Driver Info		LED Info	
Туре	Constant Current	Watts	17W
120V	0.20A	Color Temp	3500K (Warm
208V	0.10A	color remp	Neutral)
240V	0.10A	Color Accuracy	83 CRI
277V	0.10A	L70 Lifespan	60,000 Hours
Input Watts	19.7W	Lumens	2,300 lm
		Efficacy	116.4

# **Technical Specifications**

### Compliance

### UL Listed:

Suitable for damp locations

#### **CCEA Compliant:**

Luminaire Requirements used in Environmental Air Space per the electrical code specification of the City of Chicago

#### **Trade Agreements Act Compliant:**

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

#### **DLC Listed:**

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.

DLC Product Code: P8C9BVO5

### Other

### Note:

All values are typical (tolerance +/- 10%)

#### Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at <a href="mailto:rabletates">rablighting.com/warranty</a>.

#### **Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

### Performance

### Lifespan:

60,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

#### Wattage Equivalency:

Equivalent to (4)F32T8 or (4)F28T5

### Construction

#### **Maximum Ambient Temperature:**

Suitable for use in up to -30°C (-22°F) to 50°C(122°F)

#### IC Rated:

Suitable for insulated ceilings

### Lens:

Frosted polystyrene

#### Mounting:

Recessed ceiling

## Housing:

Lightweight aluminum housing, steel pan and junction box

#### Installation:

Standard integral T-bar clips secure the fixture to T-bars and prevent T-system separation

### Finish:

Formulated for high durability and long-lasting color

### Green Technology:

Mercury and UV free. RoHS-compliant components.

#### **LED Characteristics**

#### LEDs:

Long-life, high-efficacy, surface-mount LEDs

### **Electrical**

#### Driver:

Constant Current, Class 2, 50/60 Hz, 120-277V, 120V: 0.20A, 208V: 0.10A, 240V: 0.10A, 277V: 0.10A




# **Technical Specifications (continued)**

THD:

8.77% at 120V, 5.71% at 277V

**Power Factor:** 

98.8% at 120V, 89.3% at 277V

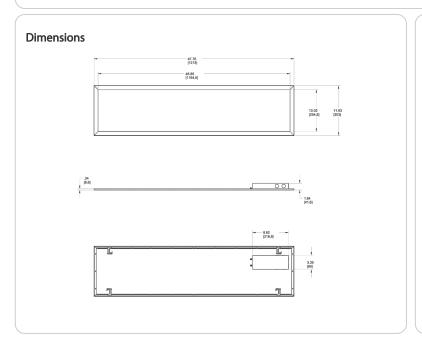

### **Features**

Perfect for shallow plenums

Even and diffuse ambient illumination, ideal for spaces where glare-free lighting is required

0-10V dimmable driver, standard

Ordering M	latrix					
Family	Size	Wattage	Color Temp	Dimming (standard)	Control Options	Other Options
EZPAN	1X4 -	17	YN	/D10		
	2X4 = 2' x 4' 2X2 = 2' x 2' 1X4 = 1' x 4'	17 = 17W 30 = 30W 40 = 40W 50 = 50W	Blank = 5000K Cool N = 4000K Neutral YN = 3500K Warm Neutral Y = 3000K Warm	<b>/D10 =</b> 0-10V Dimming	Blank = No Sensor /LC = Lightcloud® Controller	<b>/E2</b> = Battery Backup <b>Blank</b> = None