



## Technical Specifications (continued)


**THD:**  
8.44% at 120V, 6.42% at 277V

**Power Factor:**  
99.1% at 120V, 94.4% at 277V

**Battery Backup:**  
Battery backup will operate the fixture for 90 minutes if power fails. Wired for 120-277V.

**Battery Backup Light Loss Factor:**  
0.33

## Dimensions

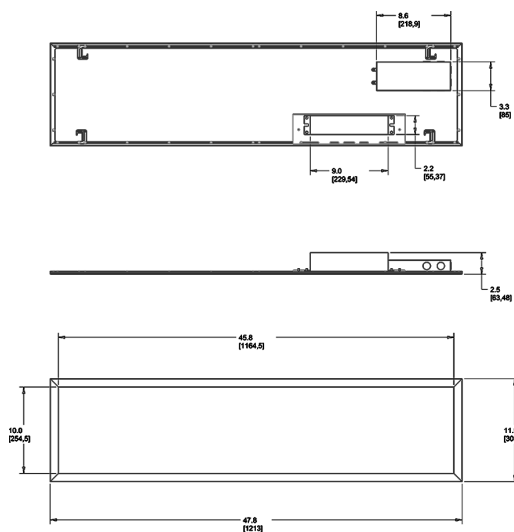

## Features

- Perfect for shallow plenums
- Even and diffuse ambient illumination, ideal for spaces where glare-free lighting is required
- 0-10V dimmable driver, standard

## Ordering Matrix

| Family | Size          | Wattage  | Color Temp              | Dimming (standard)   | Control Options              | Other Options        |
|--------|---------------|----------|-------------------------|----------------------|------------------------------|----------------------|
| EZPAN  | 1X4           | -        | 40                      | /D10                 |                              | /E2                  |
|        | 2X4 = 2' x 4' | 17 = 17W | N = 4000K Neutral       | /D10 = 0-10V Dimming | Blank = No Sensor            | Blank = None         |
|        | 2X2 = 2' x 2' | 30 = 30W | YN = 3500K Warm Neutral |                      | /LC = Lightcloud® Controller | /E2 = Battery Backup |
|        | 1X4 = 1' x 4' | 40 = 40W | Y = 3000K Warm          |                      |                              |                      |
|        |               | 50 = 50W | Blank = 5000K Cool      |                      |                              |                      |