



## Technical Specifications (continued)

### Electrical

#### Driver:

Constant Current, Class 2, 50/60 Hz, 120-277V, 120V:  
0.34A, 208V: 0.20A, 240V: 0.17A, 277V: 0.15A

#### THD:

8.42% at 120V, 6.23% at 277V

#### Power Factor:

99.1% at 120V, 94.5% at 277V


#### Battery Backup:

Battery backup will operate the LED Lamp for 90 minutes if power fails. Wired for 120V-277V.

#### Battery Backup Light Loss Factor:

0.33

## Dimensions

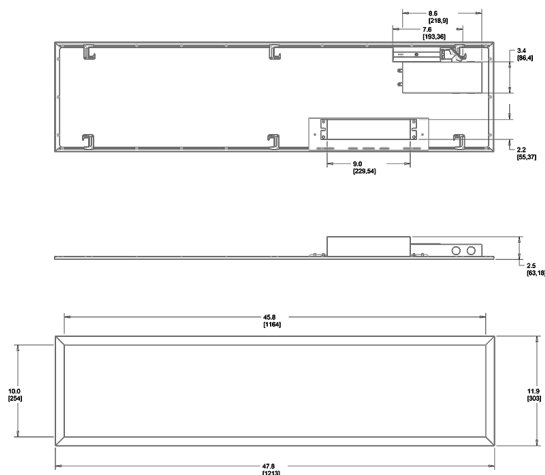

## Features

Perfect for shallow plenums

Even and diffuse ambient illumination, ideal for spaces where glare-free lighting is required

0-10V dimmable driver, standard

## Ordering Matrix

Family	Size	Wattage	Color Temp	Dimming (standard)	Control Options	Other Options
EZPAN	1X4	40	YN	/D10	/LC	/E2
	2X4 = 2' x 4'	17 = 17W	Blank = 5000K Cool	/D10 = 0-10V Dimming	Blank = No Sensor	Blank = None
	2X2 = 2' x 2'	30 = 30W	N = 4000K Neutral		/LC = Lightcloud® Controller	/E2 = Battery Backup
	1X4 = 1' x 4'	40 = 40W	YN = 3500K Warm Neutral			
		50 = 50W	Y = 3000K Warm			