

Technical Specifications (continued)

Housing:

Lightweight aluminum housing, steel pan and junction box

Installation:

Standard integral T-bar clips secure the fixture to T-bars and prevent T-system separation

Finish:

Formulated for high durability and long-lasting color

Green Technology:

Mercury and UV free. RoHS-compliant components.

Electrical

Driver:

Constant Current, Class 2, 120-277V, 50/60 Hz, 120V: 0.1A, 208V: 0.06A, 240V: 0.05A, 277V: 0.04A


THD:

8% at 120V, 10.1% at 277V

Power Factor:

99.5% at 120V, 93.7% at 277V

Dimensions

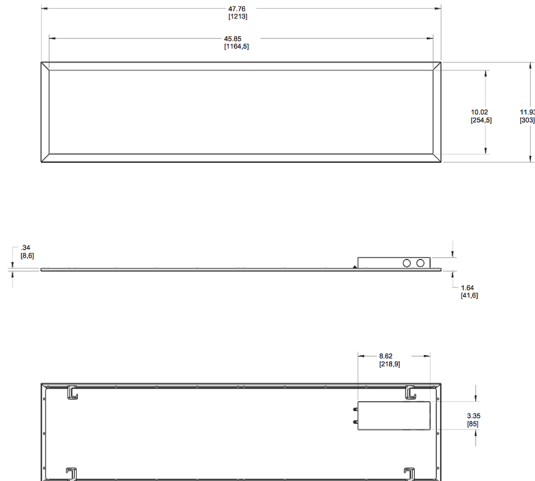

Features

Lightcloud Controller included

Ordering Matrix

Family	Size		Wattage	Color Temp	Driver	Options
EZPANHE	1X4	-	12	YN	/D10	/LC
	1X4 = 1' x 4'		12 = 12W ¹ 23 = 23W 30 = 30W	Blank = 5000K Cool N = 4000K Neutral YN = 3500K Warm Neutral Y = 3000K Warm	/D10 = 0-10V Dimming	Blank = No Option /LC = Lightcloud® Controller /E2 = Battery 120-277V

¹ The ~~23W~~ ~~23W~~ 12W is not DLC listed.