



## Technical Specifications (continued)

### Housing:

Lightweight aluminum housing, steel pan and junction box

### Installation:

Standard integral T-bar clips secure the fixture to T-bars and prevent T-system separation

### Finish:

Formulated for high durability and long-lasting color

### Green Technology:

Mercury and UV free. RoHS-compliant components.

## Electrical

### Driver:

Constant Current, Class 2, 120-277V, 50/60 Hz, 120V: 0.1A, 208V: 0.06A, 240V: 0.05A, 277V: 0.04A


### THD:

8.8% at 120V, 12.3% at 277V

### Power Factor:

99.4% at 120V, 95.3% at 277V

## Dimensions

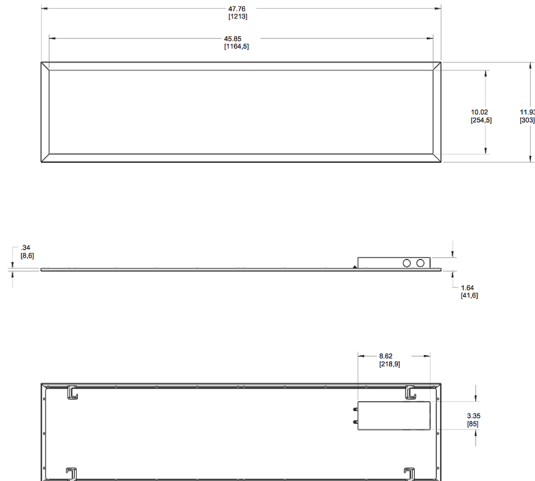

## Features

Lightcloud Controller included

## Ordering Matrix

Family	Size		Wattage	Color Temp	Driver	Options
EZPANHE	1X4	-	30	Y	/D10	/LC
	1X4 = 1' x 4'		12 = 12W <sup>1</sup> 23 = 23W 30 = 30W	Blank = 5000K Cool N = 4000K Neutral YN = 3500K Warm Neutral Y = 3000K Warm	/D10 = 0-10V Dimming	Blank = No Option /LC = Lightcloud® Controller /E2 = Battery 120-277V

<sup>1</sup> The ~~23W~~ ~~23W~~ 12W is not DLC listed.