



## Technical Specifications (continued)


### Battery Backup:

Battery backup will operate the LED Lamp for 90 minutes if power fails. Wired for 120V.

### Battery Backup Light Loss Factor:

0.825

## Dimensions

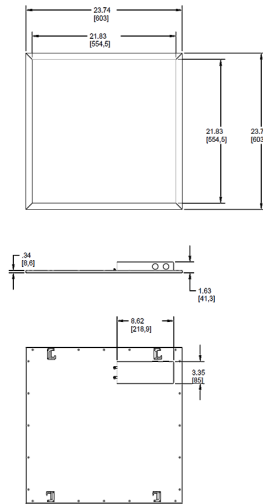

## Features

- Best in class efficacy
- Innovative use of edge lit technology for glare-free lighting
- 0-10V dimmable driver, standard
- Battery backup for standby lighting in the event of power failure/CALLOUT>

## Ordering Matrix

Family	Size	Wattage	Color Temp	Driver	Options
EZPANHE	2X2	12	YN	/D10	/E2
	2X2 = 2' x 2'	12 = 12W <sup>1</sup> 23 = 23W 30 = 30W	Blank = 5000K Cool N = 4000K Neutral YN = 3500K Warm Neutral Y = 3000K Warm	/D10 = 0-10V Dimming	Blank = No Option /LC = Lightcloud® Controller /LCB = Lightcloud® Blue Enabled /LCBS = Lightcloud® Blue Enabled w/ PIR Sensor /E2 = Battery 120-277V /LCB/E2 = Lightcloud® Blue Enabled and Battery Backup /LCBS/E2 = Lightcloud® Blue Enabled w/ PIR Sensor and Battery Backup /LCBS/MVS = Lightcloud® Blue Enabled w/ MVS Sensor /LCBS/MVS/E2 = Lightcloud® Blue Enabled w/ MVS Sensor and Battery Backup

<sup>1</sup> The 2x2x2 12W is not DLC listed.