



## Technical Specifications (continued)

### Electrical

#### Driver:

Constant Current, Class 2, 120-277V, 50/60 Hz, 120V:  
0.1A, 208V: 0.06A, 240V: 0.05A, 277V: 0.04A


#### THD:

7.5% at 120V, 9.5% at 277V

#### Power Factor:

99.3% at 120V, 96.6% at 277V

## Dimensions

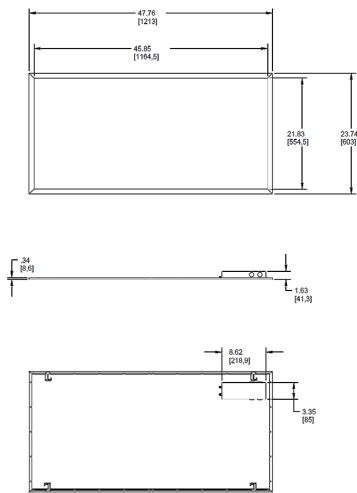

## Features

- Best in class efficacy
- Innovative use of edge lit technology for glare-free lighting
- 0-10V dimmable driver, standard

## Ordering Matrix

Family	Size	Wattage	Color Temp	Driver	Options
EZPANHE	2X4	30	Y	/D10	
	2X4 = 2' x 4'	23 = 23W 30 = 30W 46 = 46W	Blank = 5000K Cool N = 4000K Neutral YN = 3500K Warm Neutral Y = 3000K Warm	/D10 = 0-10V Dimming	Blank = No Option /LC = Lightcloud® Controller /E2 = Battery 120-277V

<sup>1</sup> The 2x4x2x4 12W is not DLC listed.