

Technical Specifications (continued)

Electrical

Driver:

Constant Current, Class 2, 120-277V, 50/60 Hz, 120V:
0.1A, 208V: 0.06A, 240V: 0.05A, 277V: 0.04A

THD:

9.5% at 120V, 11.2% at 277V

Power Factor:

99.1% at 120V, 96.7% at 277V


Battery Backup:

Battery backup will operate the LED Lamp for 90 minutes if power fails. Wired for 120V.

Battery Backup Light Loss Factor:

0.238

Dimensions

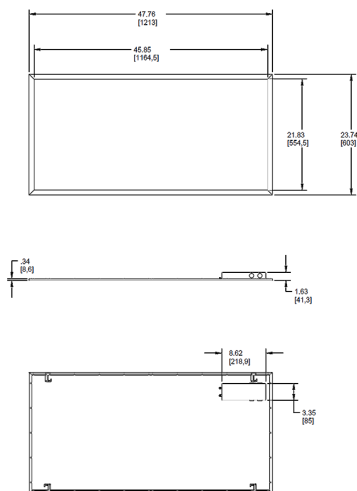

Features

- Best in class efficacy
- Innovative use of edge lit technology for glare-free lighting
- 0-10V dimmable driver, standard
- Battery backup for standby lighting in the event of power failure/CALLOUT>

Ordering Matrix

Family	Size	Wattage	Color Temp	Driver	Options
EZPANHE	2X4	46	N	/D10	/E2
	2X4 = 2' x 4'	23 = 23W 30 = 30W 46 = 46W	Blank = 5000K Cool N = 4000K Neutral YN = 3500K Warm Neutral Y = 3000K Warm	/D10 = 0-10V Dimming	Blank = No Option /LC = Lightcloud® Controller /E2 = Battery 120-277V

¹ The 2'x4'x2'x4'x12W is not DLC listed.