

Technical Specifications (continued)

Effective Projected Area:

EPA = 1.1

Gaskets:

High-temperature silicone gaskets

Finish:

Formulated for high durability and long-lasting color

Green Technology:

Mercury and UV free. RoHS-compliant components.

Electrical

Driver:

Constant Current, Class 1, 120-277V, 50/60 Hz, 120V:
1.01A, 208V: 0.63A, 240V: 0.54A, 277V: 0.46A

THD:

7.1% at 120V, 13.8% at 277V


Power Factor:

99.4% at 120V, 92.6% at 277V

Surge Protection:

6kV

Dimensions

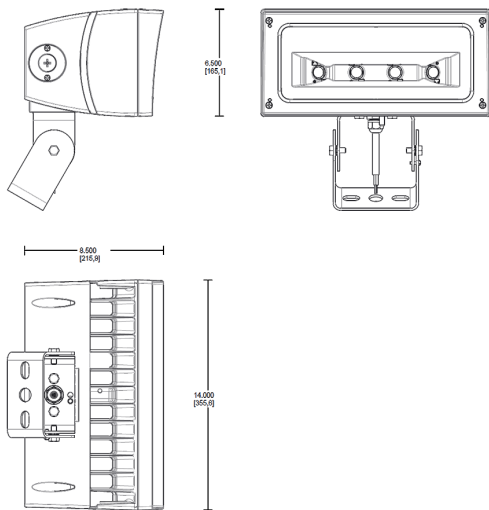

Features

- Ultra-efficient LED and optical design
- 100,000-hour life based on LM-80 results and TM-21 calculations
- "Air-Flow" technology heatsink
- 5-Year, No-Compromise Warranty and 10-Year, No-Compromise Lightcloud Warranty

Ordering Matrix

Family	Wattage	Mounting	Color Temp	Beam Spread	Finish	Driver Options	Options
FFLED	120	T	Y		W	/D10	/LC
	120 = 120W	SF = Slipfitter T = Trunnion	Blank = 5000K Cool N = 4000K Neutral Y = 3000K Warm	Blank = 7H x 6V B55 = 5H x 5V B44 = 4H x 4V	Blank = Bronze W = White	/D10 = 0-10V Dimming (120-277V) /480/D10 = 0-10V Dimming (480V)	Blank = No Option /7PR = 7-Pin Receptacle /PCT = 120-277V 3-Pin Twistlock Photocell /PCT4 = 480V 3-Pin Twistlock Photocell /LC = Lightcloud® Controller (120-277V only) /SP = 10kV Surge Suppressor