

Project:	Туре:
Prepared By:	Date:

-			_		- 4	
104	chr	ובאוו	Spe	CITI	Cati	innc
15		IILai	JUC	:UII	Lau	בו וטו

Performance

Product Type:

Decorative

Input Wattage:

5W

Lumens (Nominal):

500lm

L70 Lifespan:

15,000-Hour LED lifespan based on IES LM-70 results

Wattage Equivalency:

60W

LED Characteristics

Color Accuracy (CRI):

90 CR

Color Temperature:

2700K

Electrical

Power Factor:

>0.7

Dimmable:

Yes, down to 10%

Input Voltage:

120V

Operating Frequency:

60 Hz

Operating Temperature:

-20°C to 40°C

Construction

Bulb Shape:

G25

Enclosure Material:

Glass

Housing Finish:

Frosted

Base Type:

E26 Edison

Optical

Beam Angle:

360°

Other

Technology EQ: Incandescent

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of three (3) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Compliance

Listings:

UL Listed

Environment/Fixture Rating:

Wet / Enclosed

Energy Star Approved:

This product is ENERGY STAR® Version 2.0 Certified

Energy Star ID:

2366770

Technical Specifications (continued)

T20 Compliant:

Yes, Title 20 Tier 2

RoHS:

Mercury and UV free. RoHS-compliant components.

FCC:

Complies with Part 15B of the FCC Rules

Model Number for Certification:

G25-5-E26-927-F-F


Minimum Compartment Size

Length x Width x Height [in]	Lamp Quantity
10	1

Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	6	0	0	0
PALLET	528	0	0	0

Dimension

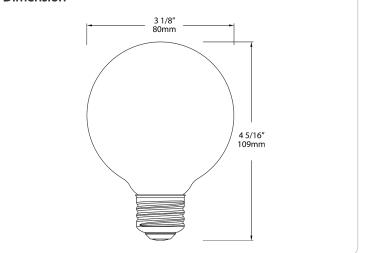

Features

Replacement for conventional decorative lamps

Filament LED construction gives a unique traditional look and feel for decorative and ambient applications

Produces rich and vibrant colors, >90CRI

Rated for use in enclosed and open fixtures in wet locations

 $Longer\ lifespan\ compared\ to\ legacy\ equivalents\ minimizes\ replacement\ and\ maintenance\ costs$

Title 20 Compliant, ENERGY STAR Compliant, UL Listed

Smooth uniform dimming down to 10% (check dimmer compatibility list)

)rdering	g Matrix				
Family	Wattage	Base Type	CRI/Color Temp	Туре	Finish
G25	5	E26	927	F	F
	3 = 3W 5 = 5W	E26 = E26	950 = 90 CRI, 5000K 940 = 90 CRI, 4000K 930 = 90 CRI, 3000K 927 = 90 CRI, 2700K		C = Clear F = Frosted