



Color: Gray

Weight: 37.7 lbs

Project:

Type:

Prepared By:

Date:

**Driver Info**

Type	Constant Current	Watts	520W
120V	4.33A	Color Temp	5000K
208V	2.50A	Color Accuracy	83 CRI
240V	2.17A	L70 Lifespan	100,000 Hours
277V	1.85A	Lumens	65,132 lm
Input Watts	519W	Efficacy	125.5

**LED Info****Technical Specifications****Compliance****UL Listed:**

Suitable for wet locations

**IESNA LM-79 & LM-80 Testing:**

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

**IP Rating:**

Ingress protection rating of IP65 for dust and water

**Trade Agreements Act Compliant:**

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

**DLC Listed:**

This product is listed by Design Lights Consortium (DLC) as an ultra-efficient premium product that qualifies for the highest tier of rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.

DLC Product Code: S-69K92N

**Electrical****Driver:**

Constant Current, Class 1, 120-277V, 50/60 Hz, 120V: 4.34A, 208V: 2.50A, 240V: 2.17A, 277V: 1.85A

**Dimming Driver:**

Driver includes wiring for 0-10V dimming systems. Dim as low as 10%.

**Surge Protection:**

20 kV

**Aux Power Supply:**

Yes

**Dim to Off:**

Yes

**LED Characteristics****LEDs:**

Long-life, high-efficacy, surface-mount LEDs

**Color Uniformity:**

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

**Performance****Lifespan:**

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

**Construction****IK Rating:**

IK10 Protected against 20 joules impact. Equivalent to impact of 11 lbs (5kg) mass dropped from 15.8" (400mm) above impacted surface.

**Cold Weather Starting:**

The minimum starting temperature is -40°F (-40°C)

**Maximum Ambient Temperature:**

Suitable for use in up to 104°F (40°C)

**Housing:**

Precision die-cast aluminum

**Lens:**

Polycarbonate lens

**Vibration Rating:**

3G vibration rating per ANSI C136.31

**Tilt Increment:**

Continuous tilting with 5° increments

**Reflector:**

Polyethylene Terephthalate (PET)

**Finish:**

Formulated for high durability and long-lasting color

**Technical Specifications (continued)****Green Technology:**

Mercury and UV free. RoHS-compliant components.

**Optical****NEMA Type:**

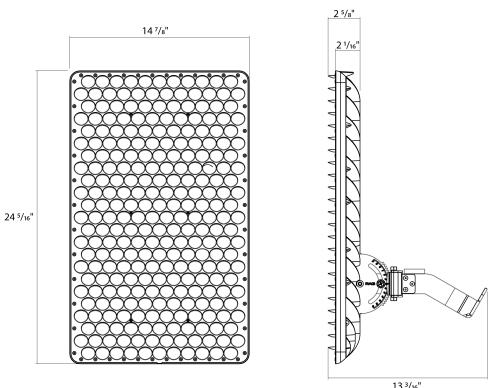
NEMA Beam Spread 5H x 5V

**Installation****Mounting:**

Trunnion mount with stainless steel hardware

**Other****10-Year Limited Warranty:**

The RAB 10-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

**Dimensions****Features**

100,000-Hour LED lifespan

IP65 rating protects against dust and water

DLC Premium listed

IK10 Rating

Industry-leading 3G vibration rating per ANSI C136.31

10-Year, Limited warranty

**Ordering Matrix**

Family	Distribution	Wattage	Mounting	Color Temp	Finish	Driver	Controls	Driver Cable Length
GAME	B55							
	Blank = 3H x 4V B55 = 5H x 5V	Blank = 520W	Blank = Trunnion	Blank = 5000K	Blank = Gray	Blank = 120-277V, 0-10V Dimming /480 = 208-480V, 0-10V Dimming	Blank = None /LC = Lightcloud /LCB = Lightcloud Blue	Blank = 10 ft Cable with Connector