



Color: Gray

Weight: 0.0 lbs

Project:

Type:

Prepared By:

Date:

Driver Info

Type	Constant Current	Watts	520W
120V	4.34A	Color Temp	5000K
208V	2.50A	Color Accuracy	83 CRI
240V	2.17A	L70 Lifespan	100,000 Hours
277V	1.85A	Lumens	67,254 lm
Input Watts	519.1W	Efficacy	129.6

LED Info

Type	Constant Current	Watts	520W
120V	4.34A	Color Temp	5000K
208V	2.50A	Color Accuracy	83 CRI
240V	2.17A	L70 Lifespan	100,000 Hours
277V	1.85A	Lumens	67,254 lm
Input Watts	519.1W	Efficacy	129.6

Technical Specifications**Lightcloud****Lightcloud Controller:**

Lamp, Zone, and plug-load control from one powerful device. Capable of switching, wireless dimming, power monitoring. Can also be used to extend the range of the Lightcloud mesh network.

Compliance**UL Listed:**

Suitable for wet locations

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

IP Rating:

Ingress protection rating of IP65 for dust and water

DLC Listed:

This product is listed by Design Lights Consortium (DLC) as an ultra-efficient premium product that qualifies for the highest tier of rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.

DLC Product Code: S-XV0K0S

Electrical**Driver:**

Constant Current, Class 1, 120-277V, 50/60 Hz, 120V: 4.34A, 208V: 2.50A, 240V: 2.17A, 277V: 1.85A

Dimming Driver:

Driver includes wiring for 0-10V dimming systems. Dim as low as 10%.

Surge Protection:

20 kV

Aux Power Supply:

Yes

Dim to Off:

Yes

LED Characteristics**LEDs:**

Long-life, high-efficacy, surface-mount LEDs

Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

Performance**Lifespan:**

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

Construction**IK Rating:**

IK10 Protected against 20 joules impact. Equivalent to impact of 11 lbs (5kg) mass dropped from 15.8" (400mm) above impacted surface.

Cold Weather Starting:

The minimum starting temperature is -40°F (-40°C)

Maximum Ambient Temperature:

Suitable for use in up to 104°F (40°C)

Housing:

Precision die-cast aluminum

Lens:

Polycarbonate lens

Vibration Rating:

3G vibration rating per ANSI C136.31

Tilt Increment:

Continuous tilting with 5° increments

Reflector:

Polyethylene Terephthalate (PET)

Effective Projected Area:

EPA = 3.2

Technical Specifications (continued)

Finish:

Formulated for high durability and long-lasting color

Green Technology:

Mercury and UV free. RoHS-compliant components.

Optical

NEMA Type:

NEMA Beam Spread 3H x 4V

Installation

Mounting:


Trunnion mount with stainless steel hardware

Other

10-Year Limited Warranty:

The RAB 10-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Dimensions

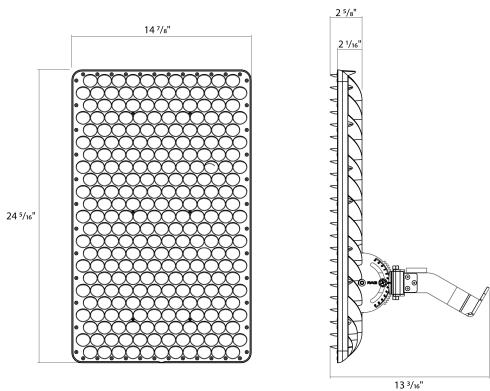

Features

100,000-Hour LED lifespan

IP65 rating protects against dust and water

DLC Premium listed

IK10 Rating

Industry-leading 3G vibration rating per ANSI C136.3110-Year, Limited warranty

Ordering Matrix

Family	Distribution	Wattage	Mounting	Color Temp	Finish	Driver	Controls	Driver Cable Length
GAME							/LC	
	Blank = 3H x 4V B55 = 5H x 5V	Blank = 520W	Blank = Trunnion	Blank = 5000K	Blank = Gray	Blank = 120-277V, 0-10V Dimming /480 = 208-480V, 0-10V Dimming	Blank = None /LC = Lightcloud /LCB = Lightcloud Blue	Blank = 10 ft Cable with Connector