## GN4LED13YSACW

# RAB



13 & 26 Watt Angled Cone Shade LED Gooseneck Luminaire designed to match the architecture of Main Street storefronts and building perimeters. LED Gooseneck Cone Shade with Wall 20" High, 19" from Wall Goose Arm Style 4.

Color: White

Weight: 16.0 lbs

### Technical Specifications

### Compliance

#### UL Listed:

Suitable for wet locations. Suitable for mounting within 4ft (1.2m) of the ground.

#### IESNA LM-79 &lm-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNAIm-79 andIm-80

#### Performance

#### Lifespan:

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

#### Wattage Equivalency:

Equivalent to 75W Incandescent, 50W Metal Halide or 18W CFL

#### Construction

#### Fixture:

The GN4LED13YSACW comes with the GOOSE4W Arm

#### Housing:

Precision die-cast aluminum housing, lens frame and mounting plate

#### Gaskets:

High-temperature Silicone

#### Mounting:

Heavy-duty mounting arm with "O" ring seal and stainless steel screw

**Cold Weather Starting:** The minimum starting temperature is -40°C (-40°F)

Shades: 15" Angled Cone Shade offered

#### Finish:

Formulated for high durability and long-lasting color

#### Green Technology:

Mercury and UV free. RoHS-compliant components.

#### LED Characteristics

LED:

Single multi-chip, 13W high-output, long-life LED

#### Color Stability:

LED color temperature is warrantied to shift no more than 200K in color temperature over a 5-year period

#### **Color Uniformity:**

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

Proje	ect:	Туре:		
Prep	ared By:	Date:		
<b>Driver li</b> Type	<b>1fo</b> Constant Current	<b>LED Info</b> Watts	13W	

Color Temp

L70 Lifespan

Lumens

Efficacy

Color Accuracy 84 CRI

3000K (Warm)

100,000 Hours

664 lm

43.4 lm/W

#### Electrical

#### Driver:

120V

208V

240V

277V

0.3A

0.3A

0.3A

0.15A

Input Watts 15.3W

Constant Current, Class 2, 100-277V, 50/60 Hz, 100-240VAC 0.3 - 0.15A, 277VAC 0.15A, THD ≤20%, PF 97.5%.

#### Surge Protection: 4kV

TIN

#### Other Patents:

The design of the Gooseneck is protected by patents pending in US, Canada, China and Taiwan

#### Warranty:


RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at <u>rablighting.com/warranty</u>.

#### **Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

## **GN4LED13YSACW**



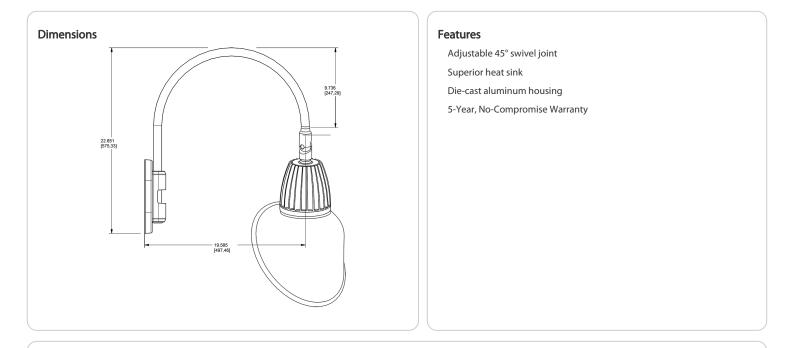

### **Ordering Matrix**

Family	Wattage	Color Temp	Reflector	Shade	ShadeSize	Finish
GN4LED	13	Y	S	AC		W
	<b>13</b> = 13W <b>26</b> = 26W	Y = 3000K Warm N = 4000K Neutral	Blank = Flood R = Rectangular S = Spot	<b>AC =</b> Angled Cone	11 = 11" Blank = 15"	B = Black W = White A = Bronze S = Silver G = Hunter Green YL = Yellow LB = Light Blue BL = Royal Blue BWN = Brown I = Ivory R = Red