



Project:	Туре:
Prepared By:	Date:

Driver Info	•	LED Info	
Type	Constant Current	Watts	36W
120V	0.30A	Color Temp	5000K (Cool)
208V	0.18A	Color Accuracy	84 CRI
240V	0.15A	L70 Lifespan	100,000 Hours
277V	0.13A	Lumens	4,853 lm
Input Watts	35.4W	Efficacy	137.1 lm/W

Technical Specifications

Compliance

UL Listed:

Suitable for damp locations

Trade Agreements Act Compliant:

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.
DLC Product Code: PZU841XC

Performance

Lifespan:

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

LED Characteristics

Color Stability:

LED Color temperature is warrantied to shift no more than 200K in color temperature over a 5-year period

Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

Electrical

Driver:

Constant current, Class 2, 120-277V, 50/60 Hz, 120V: 0.30A, 208V: 0.18A, 240V: 0.15A, 277V: 0.13A, 2kV surge protection

Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

THD:

4.29% at 120V, 3.46% at 277V

Power Factor:

99.6% at 120V, 95.8% at 277V

Minimum Starting Temperature:

0° to 40°C

Construction

Housing:

Die-formed 22 gauge, cold-rolled, post-painted steel. Post painting improves durability of the finish and eliminates the sharp edges making handling and installation safer.

Mounting:

Surface mount. Can be mounted with chains or v-hooks by others.

Lens:

Acrylic lens with diffusion for enhanced optical performance

Reflector:

Aluminum with high-reflectance (91%) powder coat applied post production for a more durable finish

Finish:

Formulated for high durability and long-lasting color

Green Technology:

Mercury and UV free. RoHS-compliant components.




Technical Specifications (continued)

Other

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

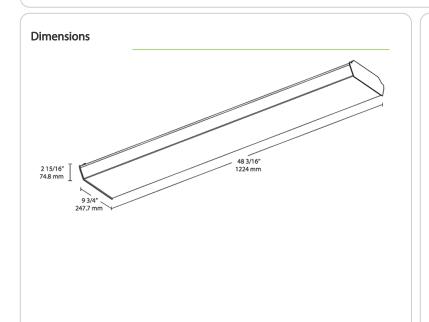

Features

Energy-efficient, maintenance-free LED wrap fixture
Multiple mounting options: surface, pendant or chain
High-reflectance white finish for optimal output
Diffusion wrap-around lens for smooth light distribution
0-10V dimming, standard
100,000-Hour LED lifespan

amily	Size	Wattage	Color Temp	Finish	Driver Options
GUS	4 -	36		W	/D10
	4 = 4 ft	18 = 18W (2 ft)	N = 4000K Neutral	W = White	/ D10 = 0-10V Dimming
	2 = 2 ft	25 = 25W (2 ft)	YN = 3500K Warm Neutral		/D10/E2 = 0-10V Dimming w/ Battery Backup
		36 = 36W (4 ft)	Y = 3000K Warm		/D10/LC = 0-10V Dimming w/ Lightcloud® Controller
		50 = 50W (4 ft)	Blank = 5000K Cool		/D10/LCB = 0-10V Dimming w/ Lightcloud® Blue Enabled
					/D10/LC/E2 = 0-10V Dimming w/ Lightcloud® Controller and Battery Backup
					/D10/LCB/E2 = 0-10V Dimming w/ Lightcloud® Blue Enabled and Battery Backup