



Project:	Туре:
Prepared By:	Date:

	LED Info	
Constant Current	Watts	36W
0.30A	Color Temp	5000K (Cool)
0.18A	Color Accuracy	84 CRI
0.15A	L70 Lifespan	100,000 Hours
0.13A	Lumens	4,853 lm
35.4W	Efficacy	137.1 lm/W
	Constant Current 0.30A 0.18A 0.15A 0.13A	Constant Current Watts 0.30A Color Temp 0.18A Color Accuracy 0.15A L70 Lifespan 0.13A Lumens

# **Technical Specifications**

# Lightcloud

## **Lightcloud Controller Installed:**

Integrated/embedded networked lighting control, luminaire-level lighting control. Fixture, Zone, and plug-load control from one powerful device. LLLC - capable of switching, 0-10Vdimming, power/energy monitoring. Can also be used to extend the range of the Lightcloud mesh network communication protocols. Offers the capability to set the maximum light output to a less-than-maximum state of an individual luminaire at the time of installation or commissioning. The High-End trim functionality is field reconfigurable via the Lightcloud mesh network communication protocols. The Lightcloud controller can be attached to the fixture, junction box, or electrical panel.

DLC system - N1XMLOEATBA Learn more about Lightcloud.

## Compliance

## **UL Listed:**

Suitable for damp locations

# **Trade Agreements Act Compliant:**

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

## **DLC Listed:**

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.

DLC Product Code: P7U841XC

# Performance

## Lifespan:

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

### **LED Characteristics**

## **Color Stability:**

LED Color temperature is warrantied to shift no more than 200K in color temperature over a 5-year period

## **Color Uniformity:**

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

# **Electrical**

#### **Driver**:

Constant current, Class 2, 120-277V, 50/60 Hz, 120V: 0.30A, 208V: 0.18A, 240V: 0.15A, 277V: 0.13A, 2kV surge protection

## **Dimming Driver:**

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

#### THD:

4.29% at 120V, 3.46% at 277V

### **Power Factor:**

99.6% at 120V, 95.8% at 277V

#### Minimum Starting Temperature:

0° to 40°C

# Construction

# Housing:

Die-formed 22 gauge, cold-rolled, post-painted steel. Post painting improves durability of the finish and eliminates the sharp edges making handling and installation safer.

#### Mounting:

Surface mount. Can be mounted with chains or v-hooks by others.

#### Lens:

Acrylic lens with diffusion for enhanced optical performance

#### Reflector:

Aluminum with high-reflectance (91%) powder coat applied post production for a more durable finish



# **Technical Specifications (continued)**

#### Finish

Formulated for high durability and long-lasting color


# Green Technology:

Mercury and UV free. RoHS-compliant components.

## Other

# **Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

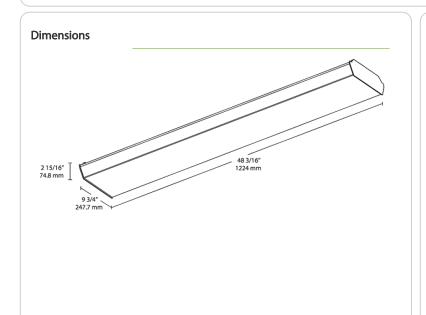

# **Features**

Energy-efficient, maintenance-free LED wrap fixture

Multiple mounting options: surface, pendant or chain

High-reflectance white finish for optimal output

Diffusion wrap-around lens for smooth light distribution

0-10V dimming, standard

100,000-Hour LED lifespan

Ordering Matrix		
	Ordorina	Matrix

Family	Size		Wattage	Color Temp	Finish	Driver Options
GUS	4	-	36		W	/D10
	<b>4</b> = 4 ft		<b>18</b> = 18W (2 ft)	<b>N</b> = 4000K Neutral	<b>W</b> = White	<b>/D10 =</b> 0-10V Dimming
	2 = 2 ft		<b>25 =</b> 25W (2 ft)	YN = 3500K Warm Neutral		/D10/E2 = 0-10V Dimming w/ Battery Backup
			<b>36</b> = 36W (4 ft)	<b>Y</b> = 3000K Warm		/D10/LC = 0-10V Dimming w/ Lightcloud® Controller
			<b>50</b> = 50W (4 ft)	Blank = 5000K Cool		/D10/LCB = 0-10V Dimming w/ Lightcloud® Blue Enabled
						/D10/LC/E2 = 0-10V Dimming w/ Lightcloud® Controller and Battery Backup
						/D10/LCB/E2 = 0-10V Dimming w/ Lightcloud® Blue Enabled and Battery Backup