RAB

36W


Neutral)

4,758 lm

128.2 lm/W

3500K (Warm

100,000 Hours

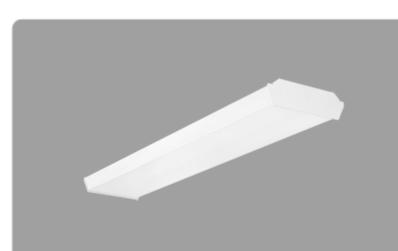

Project: Type: Prepared By: Date:	Driver Info	LED Info	
Project: Type:	Prepared By:	Date:	
	Project:	Туре:	

Watts

Color Temp

L70 Lifespan

Lumens

Efficacy

Color Accuracy 83 CRI

The affordable LED GUS is designed to deliver general ambient lighting for surface-mour ceiling/wall or pendant mount applications. Diffusion lens delivers improved visual performance and a more refined look. Replaces traditional 4' linear fluorescent wraparound fixtures.

Color: White

eight: 14.1 lbs/

Technical Specifications

Compliance

UL Listed:

Suitable for damp locations

Trade Agreements Act Compliant:

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements. DLC Product Code: PYENHFHV

Performance

Lifespan:

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

LED Characteristics

Color Stability:

LED Color temperature is warrantied to shift no more than 200K in color temperature over a 5-year period

Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

Туре

120V

208V

240V

277V

Electrical

Driver:

Constant current, Class 2, 120-277V, 50/60 Hz, 120V: 0.30A, 208V: 0.18A, 240V: 0.15A, 277V: 0.13A, 2kV surge protection

Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

THD:

4.29% at 120V, 3.46% at 277V

Power Factor:

99.6% at 120V, 95.8% at 277V

Minimum Starting Temperature: 0° to 40°C

Construction

Housing:

Constant Current

0.30A

0.18A

0.15A

0.13A

Input Watts 37.1W

Die-formed 22 gauge, cold-rolled, post-painted steel. Post painting improves durability of the finish and eliminates the sharp edges making handling and installation safer.

Mounting:

Surface mount. Can be mounted with chains or v-hooks by others.

Lens:

Acrylic lens with diffusion for enhanced optical performance

Reflector:

Aluminum with high-reflectance (91%) powder coat applied post production for a more durable finish

Finish:

Formulated for high durability and long-lasting color

Green Technology:

Mercury and UV free. RoHS-compliant components.


GUS4-36YNW/D10

Technical Specifications (continued)

Other

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

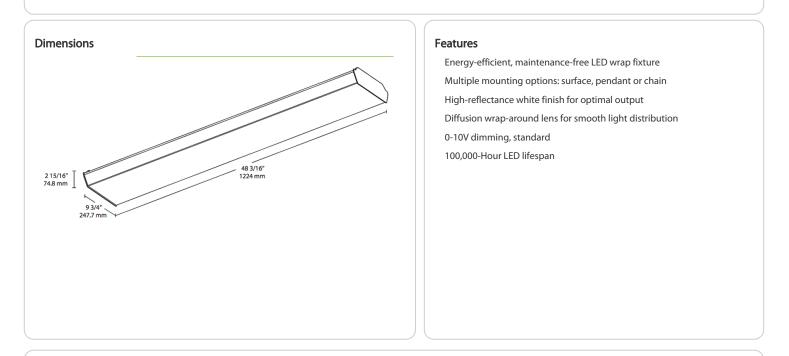

Ordering Matrix

Family	Size	Wattage	Color Temp	Finish	Driver Options
GUS	4 –	36	YN	W	/D10
	4 = 4 ft	18 = 18W (2 ft)	N = 4000K Neutral	W = White	/D10 = 0-10V Dimming
	2 = 2 ft	25 = 25W (2 ft)	YN = 3500K Warm Neutral		/D10/E2 = 0-10V Dimming w/ Battery Backup
		36 = 36W (4 ft)	Y = 3000K Warm		/D10/LC = 0-10V Dimming w/ Lightcloud [®] Controller
		50 = 50W (4 ft)	Blank = 5000K Cool		/D10/LCB = 0-10V Dimming w/ Lightcloud [®] Blue Enabled
					/D10/LC/E2 = 0-10V Dimming w/ Lightcloud® Controller and Battery Backup
					/D10/LCB/E2 = 0-10V Dimming w/ Lightcloud [®] Blue Enabled and Battery Backup