



| Project:     | Туре: |
|--------------|-------|
| Prepared By: | Date: |

| Driver Info | )                | LED Info       |               |  |
|-------------|------------------|----------------|---------------|--|
| Type        | Constant Current | Watts          | 36W           |  |
| 120V        | 0.30A            | Color Temp     | 3000K (Warm)  |  |
| 208V        | 0.18A            | Color Accuracy | 84 CRI        |  |
| 240V        | 0.15A            | L70 Lifespan   | 100,000 Hours |  |
| 277V        | 0.13A            | Lumens         | 4,671 lm      |  |
| Input Watts | 36.1W            | Efficacy       | 129.4 lm/W    |  |
|             |                  |                |               |  |

# **Technical Specifications**

# Lightcloud

## **Lightcloud Controller Installed:**

Integrated/embedded networked lighting control, luminaire-level lighting control. Fixture, Zone, and plug-load control from one powerful device. LLLC capable of switching, 0-10Vdimming, power/energy monitoring. Can also be used to extend the range of the Lightcloud mesh network communication protocols. Offers the capability to set the maximum light output to a less-than-maximum state of an individual luminaire at the time of installation or commissioning. The High-End trim functionality is field reconfigurable via the Lightcloud mesh network communication protocols. The Lightcloud controller can be attached to the fixture, junction box, or electrical panel.

DLC system - N1XMLOEATBA Learn more about Lightcloud.

## Compliance

## **UL Listed:**

Suitable for damp locations

# **DLC Listed:**

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.

DLC Product Code: PUGVHJNE

#### Performance

#### Lifespan:

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

# **LED Characteristics**

## Color Stability:

LED Color temperature is warrantied to shift no more than 200K in color temperature over a 5-year period

## **Color Uniformity:**

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

### Electrical

## Driver:

Constant current, Class 2, 120-277V, 50/60 Hz, 120V: 0.30A, 208V: 0.18A, 240V: 0.15A, 277V: 0.13A, 2kV surge protection

#### **Dimming Driver:**

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

### THD:

4.29% at 120V, 3.46% at 277V

#### **Power Factor:**

99.6% at 120V, 95.8% at 277V

# **Minimum Starting Temperature:**

0° to 40°C

## Construction

# Housing:

Die-formed 22 gauge, cold-rolled, post-painted steel. Post painting improves durability of the finish and eliminates the sharp edges making handling and installation safer.

## Mounting:

Surface mount. Can be mounted with chains or vhooks by others.

Acrylic lens with diffusion for enhanced optical performance

#### Reflector:

Aluminum with high-reflectance (91%) powder coat applied post production for a more durable finish

Formulated for high durability and long-lasting color

#### Green Technology:

Mercury and UV free. RoHS-compliant components.




# **Technical Specifications (continued)**

# Other

# **Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

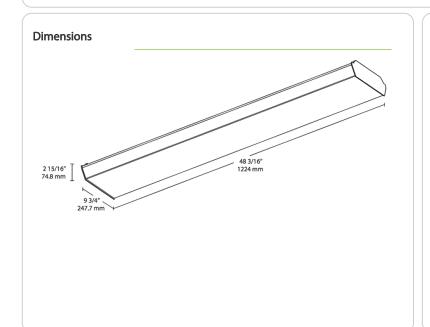

#### **Features**

Energy-efficient, maintenance-free LED wrap fixture
Multiple mounting options: surface, pendant or chain
High-reflectance white finish for optimal output
Diffusion wrap-around lens for smooth light distribution
0-10V dimming, standard
100,000-Hour LED lifespan

| Ordering Matrix |                                 |  |  |                  |  |  |  |
|-----------------|---------------------------------|--|--|------------------|--|--|--|
| Family          | Size                            | Wattage  | Color Temp   | Finish           | Driver Options   |  |  |
| GUS             | 4                               | - 36   | Y  | W                | /D10/LC  |  |  |
|                 | <b>4</b> = 4 ft <b>2</b> = 2 ft | 18 = 18W (2 ft)<br>25 = 25W (2 ft)<br>36 = 36W (4 ft)<br>50 = 50W (4 ft) | <b>Blank</b> = 5000K Cool<br><b>N</b> = 4000K Neutral<br><b>YN</b> = 3500K Warm Neutral<br><b>Y</b> = 3000K Warm | <b>W</b> = White | /D10 = 0-10V Dimming /D10/E2 = 0-10V Dimming w/ Battery Backup /D10/LC = 0-10V Dimming w/ Lightcloud® Controller /D10/LCB = 0-10V Dimming w/ Lightcloud® Blue Enabled /D10/LC/E2 = 0-10V Dimming w/ Lightcloud® Controller and Battery Backup /D10/LCB/E2 = 0-10V Dimming w/ Lightcloud® Blue Enabled and Battery Backup |  |  |