

INSTRUCTIONS

HATRIM4R HATRIM6R INSTALLATION



RAB Lighting is committed to creating high-quality, affordable, well-designed and energy-efficient LED lighting and controls that make it easy for electricians to install and end users to save energy. We'd love to hear your comments. Please call the Marketing Department at 888-RAB-1000 or email: marketing@rablighting.com

IMPORTANT

READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.

RAB fixtures must be wired in accordance with the National Electrical Code and all applicable local codes. Proper grounding is required for safety. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

WARNING: Make certain power is OFF before installing or maintaining fixture. No user serviceable parts inside.

CAUTION: For proper weatherproof function all gaskets must be seated properly and all screws inserted and tightened firmly. Apply weatherproof silicone sealant around the edge of the ceiling mounting box and/or junction box. This is especially important with an uneven ceiling surface. Silicone all plugs and unused conduit entries.

AVAILABLE TRIMS:

HALITE TRIMS	ADJUSTABLE	BAFFLE	DOWNLIGHT	WALLWASHER
4"				
6"				

AVAILABLE TRIM COLORS

A = Antique Bronze SA = Satin Nickel M* = Semi-Specular MW* = Semi-Specular Cone, White Trim
 CU = Copper W = White SW* = Specular Cone, White Trim BW** = Black Baffle, White Trim

Halite trims (each sold separately) to be used with LED modules: HALE8 or HALE12.
 Remodeler cans: RDCANIC4 or RDCANIC6. New construction cans: NDCANIC4 or NDCANIC6.
 Optics: HA50FR, HA80FR or HAWW with frosted lenses (Solite® glass option available for 50° and 80°).
 * Only available for Downlight & Wallwasher Trims. ** Only available for Baffle Trims.

INSTRUCTIONS


HATRIM4R HATRIM6R INSTALLATION



RAB Lighting is committed to creating high-quality, affordable, well-designed and energy-efficient LED lighting and controls that make it easy for electricians to install and end users to save energy. We'd love to hear your comments. Please call the Marketing Department at 888-RAB-1000 or email: marketing@rablighting.com

LED MODULE TO TRIM ASSEMBLY

1. The **LED Module** can only be installed in one orientation. **Slot** from **LED Module** must line up with **Rotation Stop** and **Lock Spring** located on **Trim ring**. See FIG.3 and FIG.4
2. Rotate **LED Module** clockwise past **Lock Spring** until snug, as shown in FIG.5A
3. For **LED Module** with Wallwasher optic, align the **Indicator Tab** on the Wallwasher Trim to the **Indicator Tab** slot as shown in Fig.5B and rotate **LED Module** clockwise past **Lock Spring** until snug.

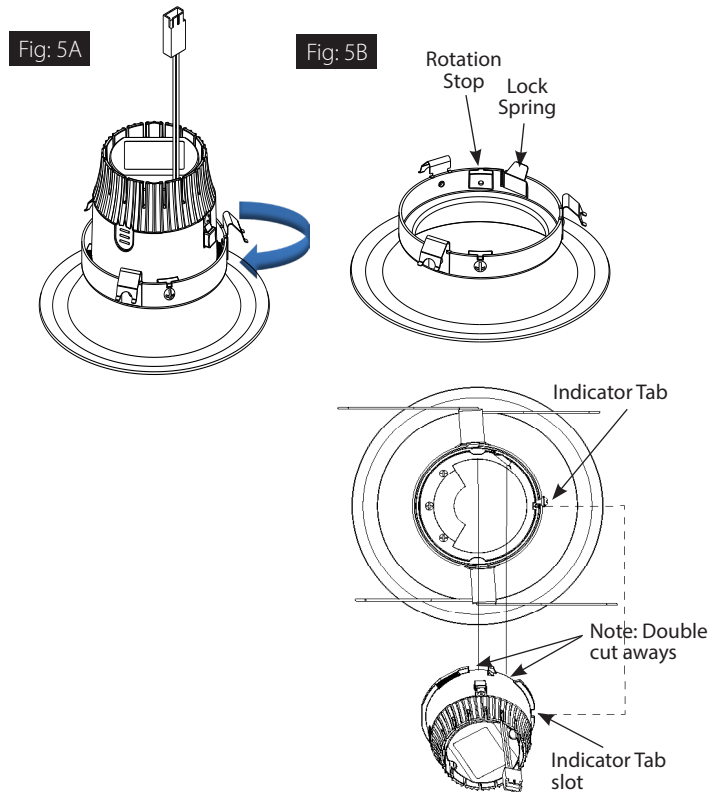

CLEANING & MAINTENANCE

CAUTION: Be sure fixture temperature is cool enough to touch. Do not clean or maintain while fixture is energized.

1. Clean lens & fixture with non-abrasive cleaning solution.
2. Do not open fixture to clean the LED. Do not touch the LED.

TROUBLESHOOTING

1. Check that the line voltage at the fixture is correct (120V-277V)
2. Is the fixture grounded properly?

Note: These instructions do not cover all details or variations in equipment nor do they provide for every possible situation during installation, operation or maintenance.



Easy Answers

rablighting.com
Visit our website for product info

Tech Help Line
Call our experts: 888 722-1000

e-mail
Answered promptly - sales@rablighting.com

Free Lighting Layouts
Answered online or by request