

FNH6 6" HOOD

Thank you for buying RAB lighting fixtures. Our aim is to design the best quality products to get the job done right. We'd like to hear your comments. Call the Marketing Department at 888-RAB-1000, or email: marketing@rabweb.com

IMPORTANT


READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.

RAB fixtures must be wired in accordance with the National Electrical Code and all applicable local codes. Proper grounding is required for safety. This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


WARNING: Make certain power is OFF before installing or maintaining fixture.

Installation

6" Hood mounts with (4) #10-24 x 3/8" stainless steel screws to door as shown. Screws are provided with hood.

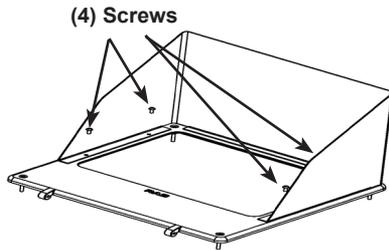

Wire Guard (GDFN) can be used with hood as shown.



CLEANING

Clean glass lens with nonabrasive glass cleaning solution.

CAUTION: Be sure fixture temperature is cool enough to touch. Do not clean or maintain while fixture is energized.

Note: These instructions do not cover all details or variations in equipment nor do they provide for every possible situation during installation, operation or maintenance.

HFX150 HOOD FXLED

Thank you for buying RAB lighting fixtures. Our goal is to design the best quality products to get the job done right. We'd like to hear your comments. Call the Marketing Department at 888-RAB-1000, or email: marketing@rabweb.com

IMPORTANT

READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.

RAB fixtures must be wired in accordance with the National Electrical Code and all applicable local codes. Proper grounding is required for safety. This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


WARNING: Make certain power is OFF before installing or maintaining fixture.

INSTALLATION

Hood mounts on **housing** with four #8-32 stainless steel **screws** to the door of **housing** as shown. Hardware is provided with **hood**.

HFX150-8 - 8" Hood for FFLED 150W (available in bronze and white)

HFX150-14 - 14" Hood for FFLED 150W (available in bronze and white)

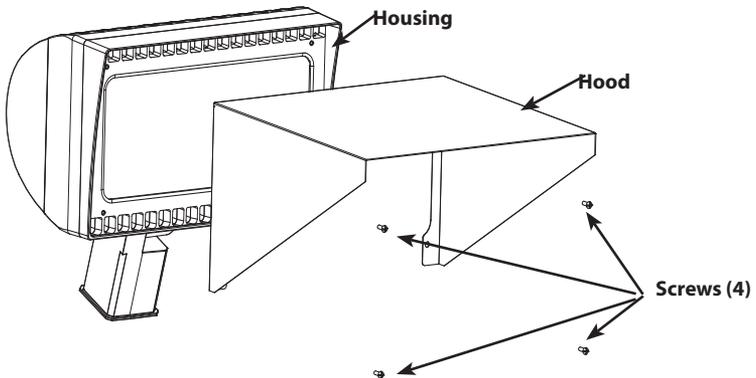

CLEANING

Clean glass lens with nonabrasive glass cleaning solution.

CAUTION: Be sure fixture temperature is cool enough to touch. Do not clean or maintain while fixture is energized.

Note: These instructions do not cover all details or variations in equipment nor do they provide for every possible situation during installation, operation or maintenance.

HFF18 HFF80 HOOD FFLED



Thank you for buying RAB lighting fixtures. Our goal is to design the best quality products to get the job done right. We'd like to hear your comments. Call the Marketing Department at 888-RAB-1000, or email: marketing@rabweb.com

IMPORTANT

READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.

RAB fixtures must be wired in accordance with the National Electrical Code and all applicable local codes. Proper grounding is required for safety. This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

WARNING: Make certain power is OFF before installing or maintaining fixture.

INSTALLATION


Hood mounts on **housing** with four #8-32 stainless steel **screws** to the door of **housing** as shown. Hardware is provided with **hood**.

HFF18-3 - 3" Hood for FFLED 18W (available in bronze and white)

HFF18-5 - 5" Hood for FFLED 18W (available in bronze and white)

HFF80-3 - 3" Hood for FFLED 26W, 39W, 52W, 80W (available in bronze and white)

HFF80-6 - 6" Hood for FFLED 26W, 39W, 52W, 80W (available in bronze and white)

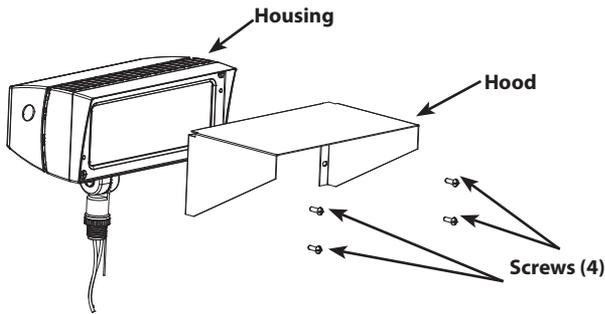

CLEANING

Clean glass lens with nonabrasive glass cleaning solution.

CAUTION: Be sure fixture temperature is cool enough to touch. Do not clean or maintain while fixture is energized.

Note: These instructions do not cover all details or variations in equipment nor do they provide for every possible situation during installation, operation or maintenance.



Easy Installation & Product Help

Tech Help Line
Call our experts. 888-RAB-1000

rabweb.com
Visit our website for product info

email
Answered promptly. sales@rabweb.com

FNH6 6" HOOD

Thank you for buying RAB lighting fixtures. Our aim is to design the best quality products to get the job done right. We'd like to hear your comments. Call the Marketing Department at 888-RAB-1000, or email: marketing@rabweb.com

IMPORTANT


READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.

RAB fixtures must be wired in accordance with the National Electrical Code and all applicable local codes. Proper grounding is required for safety. This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


WARNING: Make certain power is OFF before installing or maintaining fixture.

Installation

6" Hood mounts with (4) #10-24 x 3/8" stainless steel screws to door as shown. Screws are provided with hood.

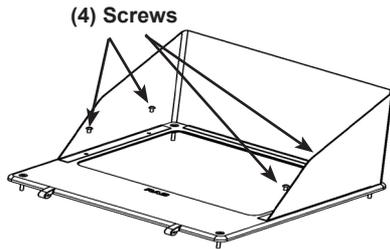

Wire Guard (GDFN) can be used with hood as shown.



CLEANING

Clean glass lens with nonabrasive glass cleaning solution.

CAUTION: Be sure fixture temperature is cool enough to touch. Do not clean or maintain while fixture is energized.

Note: These instructions do not cover all details or variations in equipment nor do they provide for every possible situation during installation, operation or maintenance.