



Date:

Watts	94W
Color Temp	5000K (Cool)
Color Accuracy	74 CRI
L70 Lifespan	100,000 Hours
Lumens	11,577 lm
Efficacy	119.4 lm/W

Diffused Polymethyl Methacrylate (PMMA)

Technical Specifications (continued)

Effective Projected Area:

EPA = 0.61

Finish:

Formulated for high durability and long-lasting color

Green Technology:

Mercury and UV free. RoHS-compliant components.

Installation

Mounting:

Universal pole adapter

Other


Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

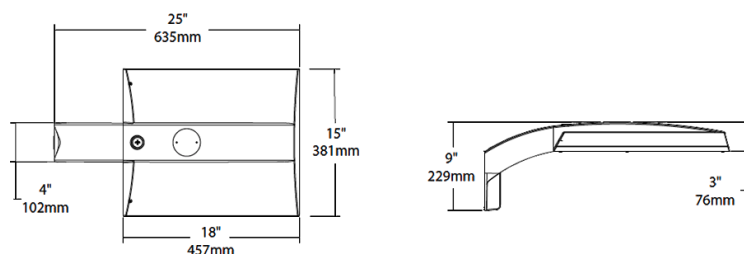

Features

0-10V Dimming, standard

100,000-Hour LED lifespan

Ordering Matrix

Family	Distribution		Lumen Output	Mounting	CRI/Color Temp	Finish	Driver	Sensor Options	Lightcloud Option
IVA	T5S	-	100L	PA	750	K	U		/LC
T3 = Type III		45L = 4,500lm (38W)		PA = Universal Pole Mount		Z = Bronze		Blank = No Options	
T4 = Type IV		75L = 7,500lm (67W)		WM = Wall mount		W = White		/WS = 8ft lens	
T5S = Type V Square		100L = 10,000lm (94W)		SF = Slipfitter		G = Roadway Gray		Wattstopper	
FT = Forward Throw		130L = 13,000lm (117W)				K = Black		/WS2 = 20ft lens	
T2 = Type II								Wattstopper	
								/WS4 = 40ft lens	
								Wattstopper	
								/7PR = 7-Pin receptacle	
								Blank = No Lightcloud®	
								/LC = Lightcloud	