



Project:	Туре:
Prepared By:	Date:

Driver Info		LED Inf	fo
Type	Constant Current	Watts	4W
120V	0.04A	Color Temp	2700K/3000K/3500K/4000K/5000K
208V	N/A	Color	93-97 CRI
240V	N/A	Accuracy	93-97 CIII
277V	N/A	L70 Lifespan	50,000 Hours
Input Watts	2.4-4.4W	Lumens	164-353 lm
		Efficacy	64-81 lm/W

Technical Specifications

Field Adjustability

Field Adjustable:

Lumen output (selectable by 100% and 50%) Color temperature (selectable by 2700K, 3000K, 3500K, 4000K and 5000K)

Compliance

UL Listed:

Dry Locations Only

Energy Star Approved:

This product is ENERGY STAR® Version 2.2 Certified

Energy Star ID:

2421018

Trade Agreements Act Compliant:

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

LED Characteristics

LEDs:

Long-life, high-efficacy, surface-mount LEDs

Color Stability:

LED color temperature is warrantied to shift no more than 200K in color temperature over a 5-year period

Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

Performance

Lifespan:

50,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

Construction

Maximum Ambient Temperature:

Suitable for use in up to 40°C (104°F)

Housing:

Die-formed steel with injection-molded endcaps

Lens:

Polycarbonate lens

Reflector/Tray:

Aluminum

Mounting:

Undercabinet surface

Green Technology:

Mercury and UV free. RoHS-compliant components.

inich:

Formulated for high durability and long-lasting color

Other

Warranty:

RAB warrants that our LED products with special corrosion resistant powder coat finish will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish in corrosive environments up to C5-M classification. RAB's warranty is subject to all terms and conditions found at <a href="mailto:rable-new rable-new rable-n

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Electrical

Driver:

Constant Current, Class 2, 60 Hz, 120V: 0.04A

THD:


3.8% at 120V



Technical Specifications (continued)

Power Factor:

99.3% at 120V

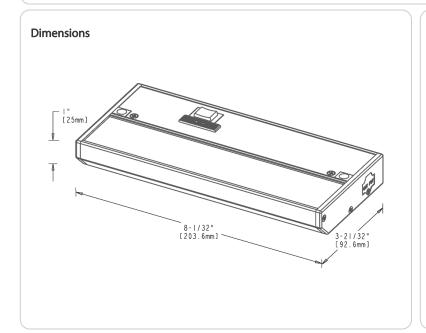

Features

- 5 discrete color temperatures
- Simple to connect multiple fixtures
- Available in four sizes (8", 16", 24" and 32") and two color finishes (white & brown)
- Compatible with common ELV & TRIAC dimmers

Ordering Matrix Family Length (Wattages) Color Temp Finish Voltage KNOOKFA 8 W W 8 = 8" (4W/2W) 16 = 16" (9W/5W) 24 = 24" (13W/7W) 32 = 32" (16W/8W) Blank = 2700K/3000K/3500K/4000K/5000K W = White Blank = Brown W = White