



UPC: 192552015707

Weight: 0.1 lbs

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

Driver Info		LED Info	
Type	Constant Current	Watts	5W
120V	0.06A	Color Temp	2200K-4500K
208V	N/A	Color Accuracy	90 CRI
240V	N/A	L70 Lifespan	15,000 Hours
277V	N/A	Lumens	500 lm
Input Watts	5W	Efficacy	133

### Technical Specifications

#### Performance

**Product Type:**

Bluetooth-Enabled Filaments

**Input Wattage:**

5W

**Lumens (Nominal):**

500lm

**Efficacy:**

133lm/W

**Lifespan:**

15,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

#### LED Characteristics

**Color Accuracy (CRI):**

>90 CRI

**Color Temperature:**

2200K-4500K

#### Electrical

**Power Factor:**

0.7

**Dimming:**

Dimmable via Lightcloud Blue mobile app

**Flicker:**

<30%

**Operating Temperature:**

-20°C to 45°C (-4°F to 113°F)

**Input Voltage:**

120V

**Operating Frequency:**

60Hz

#### Construction

**Material:**

Glass

**Bulb Shape:**

B11

**Base Type:**

E26, Medium Screw Base

#### Optical

**Beam Angle:**

360°

#### Compliance

**UL Listed:**

Suitable for wet locations

**Fixture Rating:**

Enclosed

#### Other

**Warranty:**

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of three (3) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).


**Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

**Case and Pallet Dimensions**

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	12	6.5	4.92	5
PALLET	3180	46.85	38.98	24.71

**Dimension**

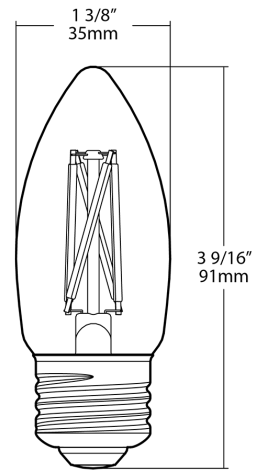

**Features**

- Direct Connect to the Lightcloud Blue mobile app via Bluetooth, no Gateway or Hub required
- Use mobile device to configure features for On/Off Control, Dim Level, Color Temperature, Schedules, Scenes, SmartShift and more.
- Tunable White 2200-4500K with smooth transition between color temperatures
- Circadian SmartShift Capable to sync with local sunrise/sunset
- Suitable for open or enclosed fixtures in dry, damp, or wet environments.
- Title 20 Compliant, ENERGY STAR® compliant, UL Listed

**Ordering Matrix**

Family	Bulb	Wattage	Base Type	CRI/Color Temp	Type	Finish	SmartShift
LCB	B11	5	E26	9TW	F	C	SS

**A19 = A19**    **5 = 5W**    **E26 = E26 Base**    **9TW = 90 CRI, Tunable White**    **F = Filament**    **C = Clear**    **SS = SmartShift**  
**G25 = G25**    **6 = 6W**  
**ST19 = ST19**  
**B11 = B11**