



<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

Driver Info		LED Info	
Type	Constant Current	Watts	10W
120V	0.10A	Color Temp	2700K-6500K
208V	N/A	Color Accuracy	95 CRI
240V	N/A	L70 Lifespan	25,000 Hours
277V	N/A	Lumens	800 lm
Input Watts	10W	Efficacy	82

## Technical Specifications

### Performance

#### Product Type:

Bluetooth-Enabled A19/BR30

#### Input Wattage:

10W

#### Lumens (Nominal):

800lm

#### Efficacy:

82lm/W

#### L70 Lifespan:

25,000-Hour LED lifespan based on IES LM-70 results

### Electrical

#### Power Factor:

>0.9

#### Dimming:

Dimmable via Lightcloud Blue mobile app

#### Flicker:

<5%

#### Operating Temperature:

-20 to 40°C (-4°F to 104°F)

#### Input Voltage:

120V

#### Operating Frequency:

60Hz

### Construction

#### Material:

Plastic

#### Bulb Shape:

BR30

#### Base Type:

E26, Medium Screw Base

### Optical

#### Beam Angle:

120°

### LED Characteristics

#### Color Temperature:

2700K-6500K

#### Color Accuracy (CRI):

>95 CRI

### Compliance

#### Energy Star Approved:

ENERGY STAR® Version 2.0 Certified

#### Model Number for Certification:

2372314

#### UL Listed:

Suitable for damp locations

#### Fixture Rating:

Enclosed

### Other

#### Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of three (3) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).


#### Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

**Case and Pallet Dimensions**

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	6	8.07	11.93	5
PALLET	864	49.21	36.57	17.05

**Dimension**

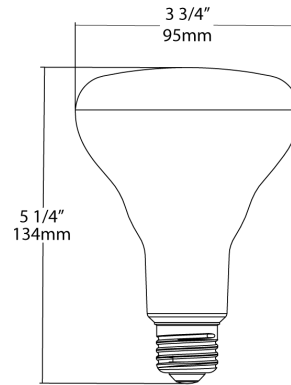

**Features**

- Direct Connect to the Lightcloud Blue mobile app via Bluetooth, no Gateway or Hub required
- Use mobile device to configure features for On/Off Control, Dim Level, Color Temperature, Schedules, Scenes, SmartShift and more.
- Natural Spectrum Technology mimics natural sunlight to see colors more accurately
- Tunable White 2700-6500K with smooth transition between color temperatures
- Circadian SmartShift Capable to sync with local sunrise/sunset

**Ordering Matrix**

Family	Wattage	Base Type	CRI/Color Temp	SmartShift	Spectrum
LCBRR30	10	E26	9TW	SS	NS
	10 = 10W	E26 = E26 Base	9TW = 90 CRI, Tunable White	SS = SmartShift	NS = Natural Spectrum