

Stop overlight and start cutting your utility bill with the Lightcloud Daylight. This solar-powered wireless sensor can dim or shut off electric lighting when sunlight is sufficient to achieve your desired lighting level.

Weight: 0.0 lbs

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

## Technical Specifications

### Compliance

**UL Listed:**

Indoor use only

### Electrical

**Installation:**

All Lightcloud components should be installed by a licensed electrician in accordance with local codes.

**Input Voltage:**

120V through 277V

**Frequencies:**

47-63 Hz

**Electrical Ratings:**

6 mA @ 120VAC

**Storage Temperature Range:**

-40°C to 85°C (-40°F to 185°F)

### Construction

**Operating Temperature Range:**

-10°C to 40°C

**Maximum Relative Humidity:**

95%

**Supported Mounting Location:**

Must be exposed to sunlight, ideally direct, and within wireless range of another Lightcloud device

### Wireless Range

**Line of Sight:**

1,000 feet

**Obstructions:**

100 feet

### Other


**Warranty:**

10-year full hardware warranty with 100% repair/replacement coverage for all properly installed devices. [See Lightcloud Warranty Terms.](#)

**Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

## Dimensions

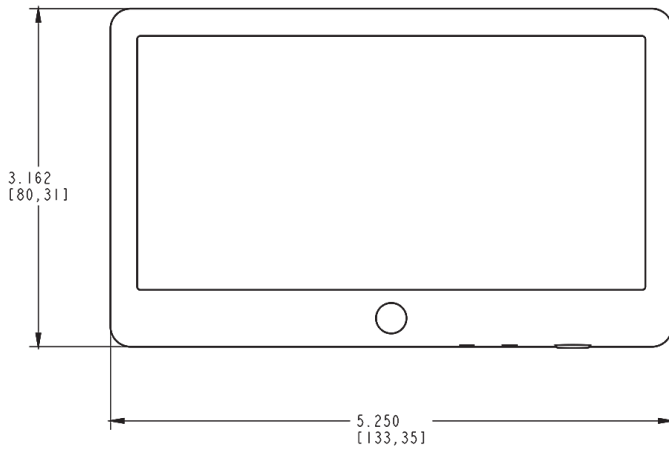

## Features

- Easy setup - simply power on, confirm device connectivity and call 844-LIGHTCLOUD
- Wireless Sensing & Configuration
- Cloud-based management - no software to install or maintain
- Ambient Light Sensor
- Innovative Self-Powered Design
- No Batteries