



The Lightcloud Outlet is a tamper resistant duplex receptacle that delivers plug-load control and measured power monitoring for loads up to 20 amps.

Color: White

Weight: 0.3 lbs

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

**Technical Specifications**

**Compliance**

**UL Listed:**

Suitable for indoor

**DLC Listed:**

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities

**Electrical**

**Installation:**

All Lightcloud components should be installed by a licensed electrician in accordance with local codes.

**Input Voltage:**

125VAC

**Frequencies:**

60 Hz

**Electrical Ratings:**

20 A @ 125VAC

**Load Switching Capacity:**

Tungsten: 1500W (12.5A)  
CFL and LED (Electronic Ballast): 5A

**Construction**

**Operating Temperature Range:**

-20°C - 40°C (-4°F - 104°F)

**Storage Temperature Range:**

-40°C to 40°C

**Maximum Relative Humidity:**

80%

**Mounting:**

Single or multi-gang junction box

**Terminal:**

15A - 14 AWG  
20A - 12AWG  
Copper Wires Only

**Wireless Range**

**Line-of-Site:**

1000 feet

**Obstructions:**

100 feet

**Other**


**Warranty:**

10-year full hardware warranty with 100% repair/replacement coverage for all properly installed devices. [See Lightcloud Warranty Terms.](#)

**Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

## Dimensions

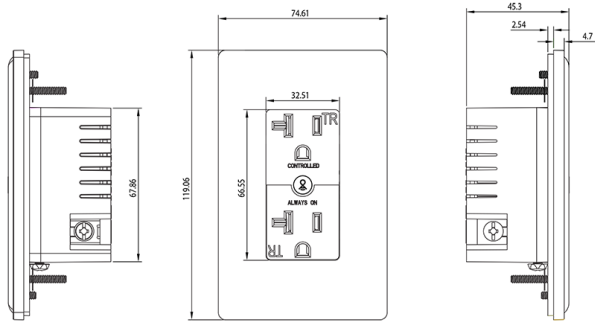

## Features

- Wireless Control & Configuration
- Cloud-based Management
- Dual Power Monitoring
- Tamper Resistant

## Ordering Matrix

Family	Finish
LCOUTLET	/W

/W = White