LCSENSE/ACC/A/K





Project:	Туре:
Prepared By:	Date:

Technical Specifications

Compliance

UL Listed:

Suitable for indoor and outdoor use

IP Rating:

Ingress protection rating of IP66 for dust and water

Electrical

Installation:

All Lightcloud components should be installed by a licensed electrician in accordance with local codes.

Storage Temperature Range:

-40°C to 85°C (-40°F to 185°F)

Product Details

Application:

Standard (8-12 ft mounting height)

Mounting Type:

Fixture/Junction Box (1/2" NPT)

Construction

Operating Temperature Range:

-20°C - 40°C (-4°F - 104°F)

Maximum Relative Humidity:

95%

Other

Warranty:


10-year full hardware warranty with 100% repair/replacement coverage for all properly installed devices. See Lightcloud Warranty Terms.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

LCSENSE/ACC/A/K



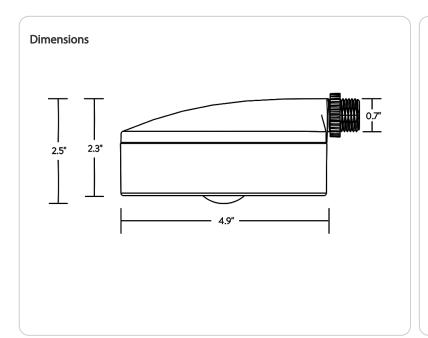

Features

Arm attachment for LCSENSE, LCSENSE15/D10, and LCHBSENSE15/D10
Suitable for Standard Height and High Bay Applications
IP66 Rated for Indoor and Outdoor Use
Sensor not included