



LFRB4P LFRB6P LENS FRAME RBAY™



Thank you for buying RAB lighting fixtures. Our aim is to design the best quality products to get the job done right. We'd like to hear your comments. Call the Marketing Department at 888-RAB-1000, or email: marketing@rabweb.com

IMPORTANT

READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.

RAB fixtures must be wired in accordance with the National Electrical Code and all applicable local codes. Proper grounding is required for safety. This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

WARNING: Make certain power is OFF before installing or maintaining fixture.

LENS FRAME KIT CONTENTS

- (1) Clear Acrylic Lens Frame with (3) Hinges attached

Clip Hardware Bag

- (3) Door Clips
- (3) 8-32 x 1/2" Stainless Steel Machine Screws

Clip Hardware Bag



(3) Door Clips

(3) Clip Screws

Hinge Hardware Bag

- (6) 8-32 x 5/16" Self-taping Machine Screws

Hinge Hardware Bag





(6) Clip Screws

LFRB4P LFRB6P LENS FRAME RBAY™


INSTALLATION

1. Fit **Lens Frame** on **Housing** such that holes on **Hinges** of door frame aligned to holes on **Housing**.
2. Secure the door using (6) **Stainless Steel Screws**.
3. Align the clip to bottom right hole of pre drilled holes on other side of **Housing** to the hole on **Door Clips**.
4. Secure the **Door Clip** using Stainless Steel Screws provided in the "Clip Hardware bag".
5. Tighten screws on **Hinges** and **Door Clips**, alternating until fully tightened..

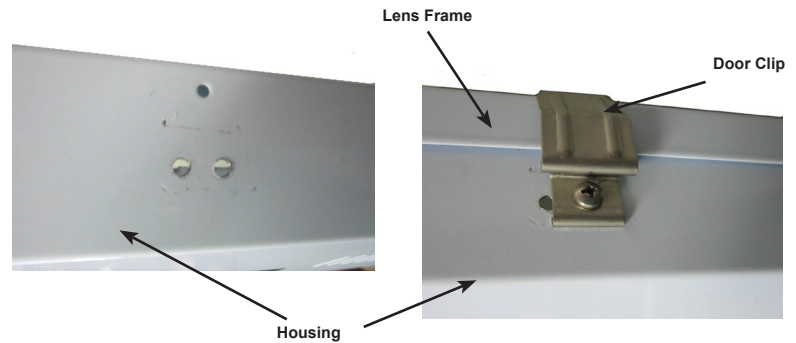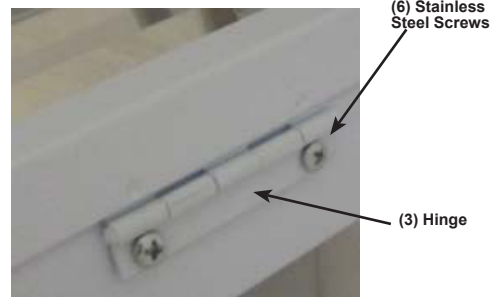

RELAMPING

1. Loosen **Clip Screws** and swing down as shown below.
2. Open **Lens Frame**.
3. Re-lamp, close **Lens Frame**.
4. Reposition **Clips** and tighten **Clip Screws**

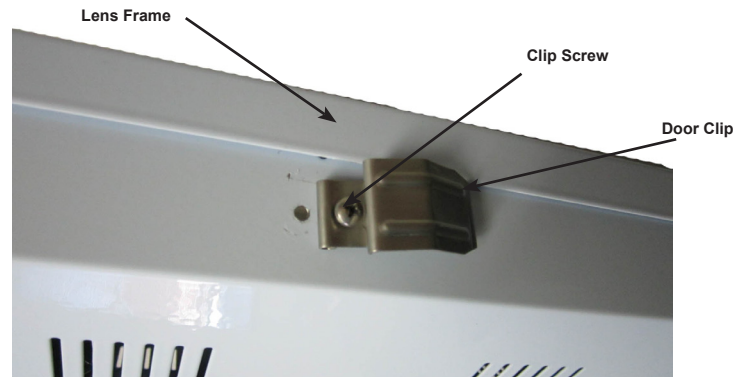

CLEANING

Clean glass lens with nonabrasive glass cleaning solution.
CAUTION: Be sure fixture temperature is cool enough to touch. Do not clean or maintain while fixture is energized.

Note: These instructions do not cover all details or variations in equipment nor do they provide for every possible situation during installation, operation or maintenance.



GDRB GUARD

Thank you for buying RAB lighting fixtures. Our aim is to design the best quality products to get the job done right. We'd like to hear your comments. Call the Marketing Department at 888-RAB-1000, or email: marketing@rabweb.com

IMPORTANT

READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.

RAB fixtures must be wired in accordance with the National Electrical Code and all applicable local codes. Proper grounding is required for safety. This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

WARNING: Make certain power is OFF before installing or maintaining fixture.

Installation

Wire Guard mounts with (6) clips and screws to the RBAY housing as shown. Screws and clips are provided with guard.



CLEANING

CAUTION: Be sure fixture temperature is cool enough to touch. Do not clean or maintain while fixture is energized.

Note: These instructions do not cover all details or variations in equipment nor do they provide for every possible situation during installation, operation or maintenance.



GDRB-IN-0110

Easy Installation & Product Help

Tech Help Line

Call our experts
888 RAB-1000

Toll Free Fax

Send a fax to RAB
888 RAB-1232

rabweb.com

Visit our website
for product info

e-mail

Answered promptly
sales@rabweb.com