



Project:	Туре:
Prepared By:	Date:

Driver Info		LED Info	
Туре	Constant Current	Watts I	N/A
120V	N/A	Color Temp I	N/A
208V	N/A	Color Accuracy 1	N/A
240V	N/A	L70 Lifespan	N/A
277V	N/A	Lumens I	N/A
Input Watts	N/A	Efficacy I	N/A

Technical Specifications

Optical

LNSLFLED with NEMA Type:

3000K: NEMA Type 3H x 3V 4000K: NEMA Type 3H x 3V 4800K: NEMA Type 3H x 2V

Construction

Lens:

Microprismatic diffusion lens for smooth and even light distribution

Housing:

Precision die-cast aluminum housing

Finish:

Formulated for high durability and long-lasting color

Other

Compatibility:


Compatible with LFLED8 and LFLED4LV.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

LNSLFLED8W



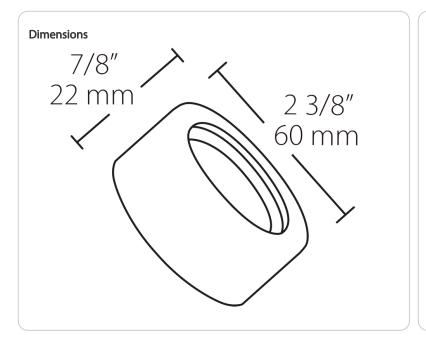

Features

Microprismatic diffusion lens for smooth and even light distribution Precision die-cast aluminum housing

5-Year, No-Compromise Warranty