LSLFLEDW





Project:	Туре:
Prepared By:	Date:

Driver Info		LED Info	
Туре	Constant Current	Watts	N/A
120V	N/A	Color Temp	N/A
208V	N/A	Color Accuracy	N/A
240V	N/A	L70 Lifespan	N/A
277V	N/A	Lumens	N/A
Input Watts	N/A	Efficacy	N/A

Technical Specifications

Compliance

UL Listed:

Suitable for wet locations. Suitable for ground mounting.

Construction

Lens

Microprismatic diffusion lens for smooth and even light distribution

Housing:

Precision die-cast aluminum

Finish

Formulated for high durability and long-lasting color

Optical

NEMA Type:

Fixture has a NEMA Type 3H x 3V

Other

Compatibility:

Compatible with LFLED5W.


Patents

The design of the LSFLED is protected by patents pending in US, Canada, China, Taiwan and Mexico

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.



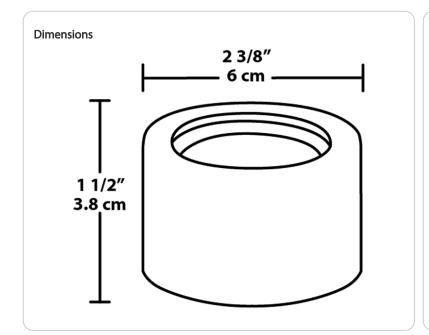

Features

Microprismatic diffusion lens for smooth and even light distribution Precision die-cast aluminum housing

5-Year, No-Compromise Warranty