

Weight: 46.6 lbs

Project:

Type:

Prepared By:

Date:

Driver Info

Type	Constant Current, Class A	Watts	N/A
120V	N/A	Color Temp	N/A
208V	N/A	Color Accuracy	N/A
240V	N/A	L70 Lifespan	50,000 Hours
277V	N/A	Lumens	N/A
Input Watts		Efficacy	N/A

LED Info**Technical Specifications****Performance****Product Type:**

New Construction Housing

Description:

Modular commercial downlights with field-adjustable wattage, CCT, and optics. Select from various interchangeable modules, trims, and accessories.

Electrical**Controls:**

Can accept LCBAUX Controller

Construction**Trim Size:**

Compatible with 3", 4", 6", 8" & 10" trim reflectors

Trim Shape:

Square

Compliance**IC Rated:**

No

Other**5-Year, No-Compromise Warranty:**

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Compatible Products:

ND22-12
3" Modular Downlight 12W

ND22-20
4" Modular Downlight 20W


ND22-30
6" Modular Downlight 30W

ND22-50
8" Modular Downlight 50W

Trade Agreements Act Compliant:

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

Dimensions

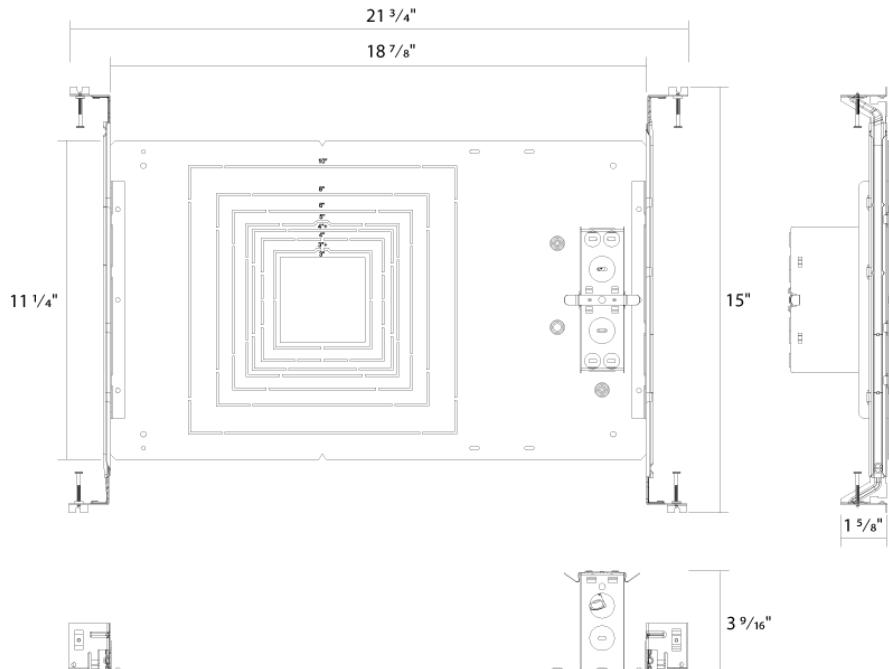

Ordering Matrix

Family	Shape	Controls
ND22	SFRAME	
	RFRAME = New construction frame for Round Trims	Blank = None
	SFRAME = New construction frame for Square Trims	/LCB = Lightcloud Blue