



Easy to install 2" new construction rough-in for use with RDLED2 trims. The Remodeler Trim component must be ordered with the New Construction Housing in order to make a complete fixture. Available in flush trim for a trimless look without the mess left behind from ceiling finishing work.

Weight: 2.8 lbs

Project:	Туре:
Prepared By:	Date:

Driver Info	)	LED Info	
Type	N/A	Watts	N/A
120V	N/A	Color Temp	Sold Separately
208V	N/A	Color Accuracy	N/A
240V	N/A	L70 Lifespan	N/A
277V	N/A	Lumens	N/A
Input Watts	N/A	Efficacy	N/A

# **Technical Specifications**

## Compliance

#### UL Listed:

Suitable for wet locations in a covered ceiling

#### Construction

#### IC Rated:

Suitable for direct contact with insulation

## **Housing Component:**

This component must be ordered with the 2 inch downlights trim in order to make a complete fixture. See here for Round 2" Trims See here for Square 2" Trims

#### Housing:

Professional-grade, heavy-gauge steel construction with 1 1/4" spackle flange for trim less installation

## Mounting:

Housing includes nailer bars and butterfly brackets. Brackets also accommodate mounting with 1/4" to 1/2" bar stock, C channel or 1/2" conduit.

## Junction Box:

Integral junction box with wiring capacity for Min 60°C supply conductors End of Run

#### Air Tight:

Housing certified Air Tight as per ASTM E283

#### Easy Installation:

Ceiling clamps install quickly and hold housing securely. Clamp ceilings from 1/2" to 2 1/2" thick, with course and fine adjustments.

#### **Trimless Look:**

Flush trim for a trimless look without the hassle. Complete ceiling finishing work (spackling, sanding, painting) before installing to ensure a clean trim.

#### Other

#### Warranty:


RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

#### **Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

ND2TL



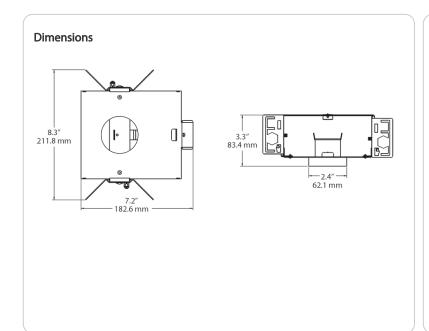

#### Features

Butterfly bracket allows mounting with bar stock, "C" channel, 1/2" conduit or nailer bars

Low-profile design allows for installation in ceilings with limited space IC rated without additional hardware required

## **Ordering Matrix**

Family	Size	Trim
ND	2	
	<b>2</b> = 2"	T = Trim TL = Trimless