



Color: Black

Weight: 36.5 lbs

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

Driver Info		LED Info	
Type	Constant Current	Watts	600W
120V	N/A	Color Temp	5700K
208V	3.01A	Color Accuracy	76 CRI
240V	2.61A	L70 Lifespan	100,000 Hours
277V	2.26A	Lumens	84,769 lm
Input Watts	590.5W	Efficacy	143.6

### Technical Specifications

#### Compliance

**UL Listed:**

Suitable for wet locations

**IESNA LM-79 & LM-80 Testing:**

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

**IP Rating:**

Ingress protection rating of IP65 for dust and water

**DLC Listed:**

This product is listed by Design Lights Consortium (DLC) as an ultra-efficient premium product that qualifies for the highest tier of rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.

DLC Product Code: S-ZWXHP5

#### Electrical

**Driver:**

Constant Current, Class 1, 200-480V, 50/60 Hz, 208V: 3.01A 240V: 2.61A, 277V: 2.26A, 480V: 1.31A

**Dimming Driver:**

Driver includes wiring for 0-10V dimming systems. Dim as low as 10%.

**THD:**

4.91% at 480V

**Power Factor:**

97.3% at 480V

**Surge Protection:**

20kV

**Aux Power Supply:**

Yes

**Dim to Off:**

Yes

#### LED Characteristics

**LEDs:**

Long-life, high-efficacy, surface-mount LEDs

**Color Uniformity:**

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

#### Performance

**Lifespan:**

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

#### Construction

**Cold Weather Starting:**

The minimum starting temperature is -40°C (-40°F)

**Maximum Ambient Temperature:**

Suitable for use in up to 50°C (122°F)

**Housing:**

Precision die-cast aluminum

**Lens:**

Polycarbonate lens

**Tilt Increment:**

Continuous tilting with 5° increments

**Effective Projected Area (With Shield):**

0°: 1.2864  
 15°: 1.2934  
 25°: 1.43  
 45°: 1.7071  
 60°: 1.873  
 75°: 2.0015  
 90°: 2.0669

**Gaskets:**

High-temperature silicone

**Finish:**

Formulated for high durability and long-lasting color

**Green Technology:**

Mercury and UV free. RoHS-compliant components.

**Technical Specifications (continued)**

**Installation**

**Mounting:**

Trunnion mount with stainless steel hardware

**Optical**

**NEMA Type:**

NEMA Beam Spread of 4H x 4V

**Other**


**10 Yr Limited Warranty:**

The RAB 10-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

**Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

**Dimensions**

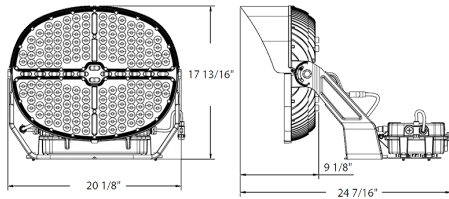

**Features**

- 100,000-Hour LED lifespan
- IP65 rating protects against dust and water
- 10-Year, Limited warranty

**Ordering Matrix**

Family	Wattage	Color Temp	Mounting	Optics	Finish	Driver	Options
P1	M					/480	
	S = 500W M = 600W L = 850W XL = 1200W	Blank = 5700K	Blank = Yoke Mount	Blank = 4H x 4V B33 = 3H x 3V B22 = 2H x 2V	Blank = Black	Blank = 120-277V, 0-10V Dimming /480 = 200-480V, 0-10V Dimming	Blank = No Option /LC = Lightcloud