



UPC: 192552005944

Color: Clear

Weight: 0.3 lbs

Project:	Type:
Prepared By:	Date:

Technical Specifications

Performance

Product Type:

Compacts

Input Wattage:

14.5W

Lumens (Nominal):

2,000lm

Efficacy:

118lm/W

L70 Lifespan:

50,000-Hour LED lifespan based on IES LM-70 results

Wattage Equivalency:

36W CFL

Electrical

THD:

20%

Power Factor:

0.9

Dimmable:

Not suggested for dimming applications

Operating Temperature:

-20°C to 45°C (-4°F to 113°F)

Input Voltage:

120-277V

Operating Frequency:

50/60Hz

Compliance

UL Listed:

Suitable for damp locations

Enclosed Fixtures:

Suitable for use in enclosed fixtures

LED Characteristics

Color Temperature:

5000K

Color Accuracy (CRI):

≥80 CRI

Construction

Bulb Shape:

PLL 16in

Base Type:

2G11

Endcap Material:

Polycarbonate

Enclosure Material:

Glass & Polycarbonate

Optical

Beam Angle:

120°

Other

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.


Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	12	7.9	3.3	8
PALLET	144	47.48	37.56	39.21

Dimension

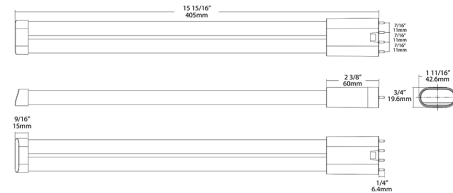

Features

- Replaces 36W twin tube CFL 2G11 Lamps
- Ballast Compatible. Directly Compatible with Most Existing Electronic CFL Ballasts.
- Compatible with 2G11 (4-pin CFL) installations
- 50,000 hour Lifespan
- Environmentally friendly, no mercury used
- UL Listed
- Rated for use in enclosed and open fixtures in dry or damp locations
- 5 Year No Compromise Warranty

Ordering Matrix

Family	Wattage	CRI/Color Temp	Installation Type
PLL	14	850	DIR
	13.5 = 13.5W 14 = 14W	850 = 80 CRI, 5000K 840 = 80 CRI, 4000K 835 = 80 CRI, 3500K 830 = 80 CRI, 3000K	DIR = Ballast Compatible