
PLL-17-835-BYP

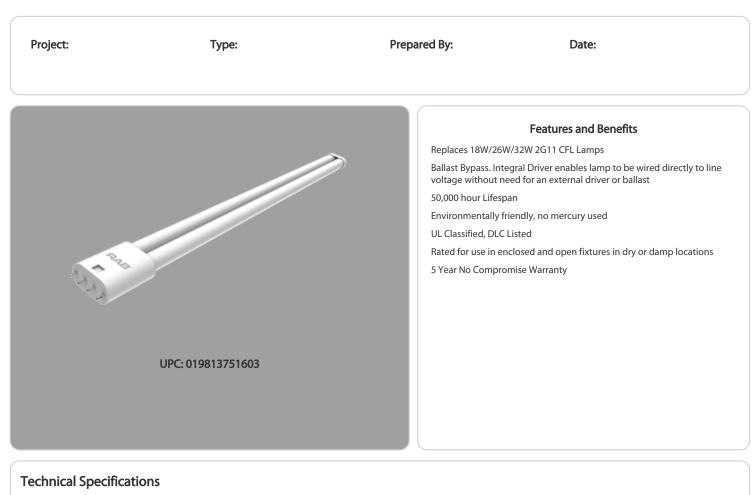

Performance Product Type: Compacts

Input Wattage: 17W

Wattage Equivalency: 40W Fluorescent

Lumens (Nominal): 2,100lm

Efficacy: 124lm/W

L70 Lifespan: 50,000 Hours

Electrical

THD: <20%

Power Factor: 0.9

Dimmable: Not suggested for dimming applications

Operating Temperature: -20°C to 45°C (-4°F to 113°F)

Input Voltage: 120-277V AC

Operating Frequency: 50/60Hz

Construction Bulb Shape: PLL

Finish: Frosted

Base Type: 2G11

For Use Outdoors in Open Fixtures: No

LED Characteristics

Color Temperature: 3500K Neutral White

Color Accuracy (CRI): 82 CRI

Other

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at <u>rablighting.com/warranty</u>.

Installation

Installation Type: Type B, Ballast Bypass

Installation Orientation: Horizontal

PLL-17-835-BYP

RAB

Technical Specifications (continued)

Compliance

UL Recognized: Yes

UL Classified:

Yes

NSF Listed:

Meets NSF/ANSI standards for use in Food Zone (non-contact), Splash, and Non-Food Zones. Tube guard required in open fixtures.

Model Number for Certification:

PLL-17-835-BYP

California Energy Commission (CEC) Status: Lawful for Sales in California

Application:


Suitable for damp locations and totally enclosed fixtures.

DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements. DLC Product Code: PSNCMEPC

Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	25	23.6	9.8	7
PALLET	1400	47.2	39.4	40.2

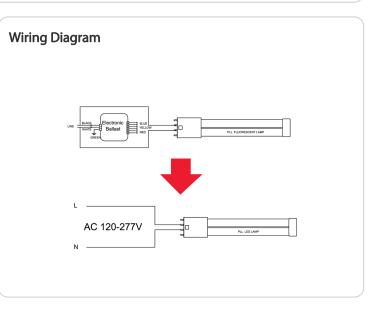

PLL-17-835-BYP

