

<b>Project:</b>	<b>Type:</b>	<b>Prepared By:</b>	<b>Date:</b>
-----------------	--------------	---------------------	--------------



**Features and Benefits**

- Replaces 18W/26W/32W G24d & G24q CFL Lamps
- Ballast Bypass. Integral Driver enables lamp to be wired directly to line voltage without need for an external driver or ballast
- Compatible with G24d / GX24d & G24q / GX24q installations
- 50,000 hour Lifespan
- Environmentally friendly, no mercury used
- UL Classified
- Rated for use in enclosed and open fixtures in dry or damp locations
- Non-Dimmable
- 5 Year No Compromise Warranty

Technical Specifications		
<b>Performance</b>	<b>Electrical</b>	<b>Housing Finish:</b>
<b>Product Type:</b> Compacts	<b>THD:</b> 20%	White
<b>Input Wattage:</b> 16.5W	<b>Power Factor:</b> >0.9	<b>Lens Finish:</b> Frosted
<b>Lumens (Nominal):</b> 1,850lm	<b>Dimmable:</b> Non-Dim	<b>Base Type:</b> 2-Pin G24d
<b>Efficacy:</b> 112lm/W	<b>Input Voltage:</b> 120-277V AC	<b>Optical</b>
<b>L70 Lifespan:</b> 50,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations	<b>Operating Frequency:</b> 50/60Hz	<b>Beam Angle:</b> 120°
<b>Wattage Equivalency:</b> 42W G24d/G24q/Gx24q	<b>Operating Temperature:</b> -20°C to 45°C (-4°F to 113°F)	<b>Installation</b>
<b>LED Characteristics</b>	<b>Construction</b>	<b>Installation Method:</b> UL Type B, Ballast Bypass
<b>Color Accuracy (CRI):</b> 80	<b>Bulb Shape:</b> PLT-Vertical	<b>Burning Position:</b> Vertical
<b>Color Temperature:</b> 3000K	<b>Enclosure Material:</b> Polycarbonate	<b>Other</b>
		<b>Technology EQ:</b> CFL

## Technical Specifications (continued)

### Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

### Compliance

#### Listings:

UL Classified, UL Recognized

#### Environment/Fixture Rating:

Damp / Open

#### RoHS:

Mercury and UV free. RoHS-compliant components.

#### FCC:

Complies with Part 15B of the FCC Rules

#### Model Number for Certification:

T10223(PLT-16.5-V-830-BYP)


## Minimum Compartment Size

Length x Width x Height [in]	Lamp Quantity
15	1

## Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	12	0	0	0
PALLET	130	0	0	0

## Dimension

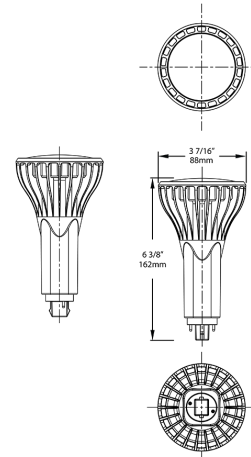

Light Distribution

