PR4-07-25WT

RAB



Project:	Туре:
Prepared By:	Date:

Technical Specifications

Compliance

CSA Listed:

Suitable for wet locations

Performance

Description:

Steel pole 4" round 7 gauge 25 foot welded tenon square base

Construction

Shaft:

46,000 p.s.i. minimum yield.

Hand Holes: Reinforced with grounding lug and removable cover

Base Plates: 36,000 p.s.i. minimum yield.

Color: Bronze powder coating

Height: 25 ft

Gauge:

7

Wall Thickness: 3/16"

Shaft Size:

4"

Anchor Bolt Templates:

WARNING Template must be printed on 11" x 17" sheet for actual size. CHECK SCALE BEFORE USING. Templates shipped with anchor bolts and available <u>online</u>.

Max EPA's/Max Weights:

70MPH 9.5 ft/380 lb. 80MPH 6.3 ft/230 lb. 90MPH 4.1 ft/150 lb. 100MPH 2.6 ft/120 lb. 110MPH 1.4 ft/70 lb. 120MPH 0.5 ft/60 lb

Accessories:

Base/Cap: <u>BASE-R4</u> Anchor Bolts: <u>BOLT4/7</u>

Other


Terms of Sale: Pole Terms of Sale is available <u>online</u>.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

PR4-07-25WT



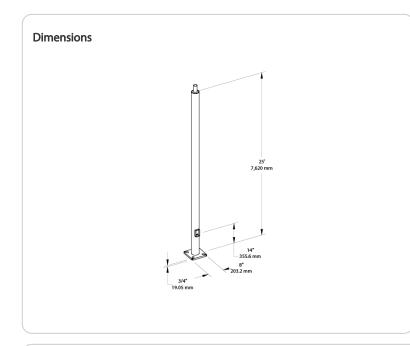

Ordering Matrix

Family	Shape	Size	Gauge	Height	Drilled/Welded Tenon
Р	R	4	7	25	WT
	R = Round TR = Tapered Round	4 = 4" 5 = 5" 6 = 6" 7 = 7" 8 = 8"		10 = 10' 15 = 15' 20 = 20' 25 = 25' 30 = 30'	D2 = Drilled WT = Welded Tenon

Features

Designed for ground mounting

Heavy duty TGIC polyester coating

Reinforced hand holes with grounding lug and removable cover for easy wiring access

Pole caps, base covers & bolts are sold separately

Custom manufactured for each application