
PR4-11-10WT

RAB

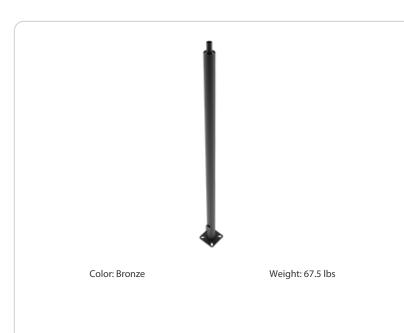

Project:	Туре:
Prepared By:	Date:

Technical Specifications

Compliance

CSA Listed: Suitable for wet locations

Performance

Description: Steel pole 4" round 11 gauge 10 foot welded tenon square base

Construction

Shaft:

46,000 p.s.i. minimum yield.

Hand Holes: Reinforced with grounding lug and removable cover

Base Plates: Slotted base plates 36,000 p.s.i.

Color: Bronze powder coating

Tenon: Welded 2 3/8" tenon included

Height: 10 ft

Gauge:

11

Wall Thickness: 1/8"

Shaft Size: 4"

Anchor Bolt Templates:

WARNING Template must be printed on 11" x 17" sheet for actual size. CHECK SCALE BEFORE USING. Templates shipped with anchor bolts and available <u>online</u>.

Max EPA's/Max Weights:

70MPH 19.1 ft/700 lb. 80MPH 14.4 ft/620 lb. 90MPH 11.1 ft/585 lb. 100MPH 8.7 ft/445 lb. 110MPH 7.0 ft/370 lb. 120MPH 5.7 ft/335lb. 130MPH 4.6 ft/300 lb. 140MPH 3.8 ft/265 lb. 150MPH 3.1 ft/180 lb

Accessories:

Base/Cap: <u>BASE-R4</u> Anchor Bolts: <u>BOLT4/11</u>

Other

Terms of Sale:


Pole Terms of Sale is available online.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

PR4-11-10WT



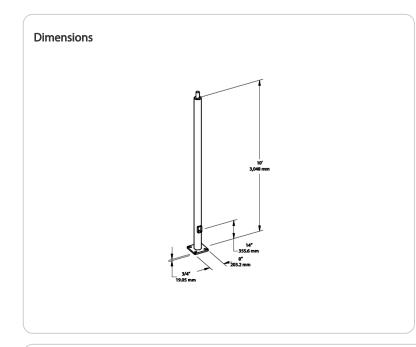

Ordering Matrix

Family	Shape	Size	Gauge	Height	Drilled/Welded Tenon
Р	R	4	11	10	WT
		4 = 4" 5 = 5" 6 = 6" 7 = 7" 8 = 8"		10 = 10' 15 = 15' 20 = 20' 25 = 25' 30 = 30'	D2 = Drilled WT = Welded Tenon

Features

Designed for ground mounting

Heavy duty TGIC polyester coating

Reinforced hand holes with grounding lug and removable cover for easy wiring access

Pole caps, base covers & bolts are sold separately

Custom manufactured for each application